


LED ROUND DOWNLIGHT WITH J BOX

Catalog #		Type
Project		Date
Prepared by		

SPECIFICATIONS

Wattage.....	15W
Input Voltage.....	AC90-305V
LED Quantity.....	30 pcs
LED Type.....	EPISTAR SMD5630 LED
Luminous Flux.....	1050-1200 IM
LED Luminous Efficiency.....	80±5% Lm/W
Beam Angle.....	120°
CCT.....	3000K, 4000K, 5000K
IP Grade.....	IP20
Power Supply.....	>85%
Efficiency.....	>0.95
Power Factor.....	>80 Ra
CRI.....	1000 G
Lifetime.....	50000 hrs
Dimensions.....	7.31" x H 3.25" (186mm x 83mm)
Cutout.....	Ø 6.31" (160 mm)

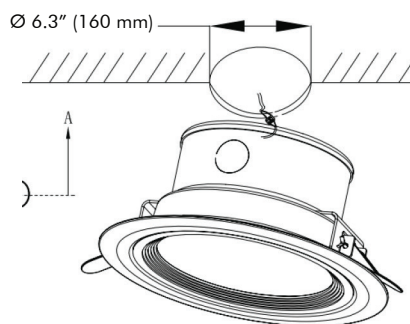

MODEL #	CCT
LB****	3000K
LB****	4000K
LB****	5000K

Features and benefits:

- Long lifespan.
- Energy saving with high efficiency.
- Environment friendly, No UV, No IR radiation.
- Immediate start, no flicking.
- Outer side isolated constant current LED driver.
- Integral aluminium housing for maximum heat dissipation.

Light Distribution Curve

