



RGBW Wall Controller Installation Guide

INSTRUCTION

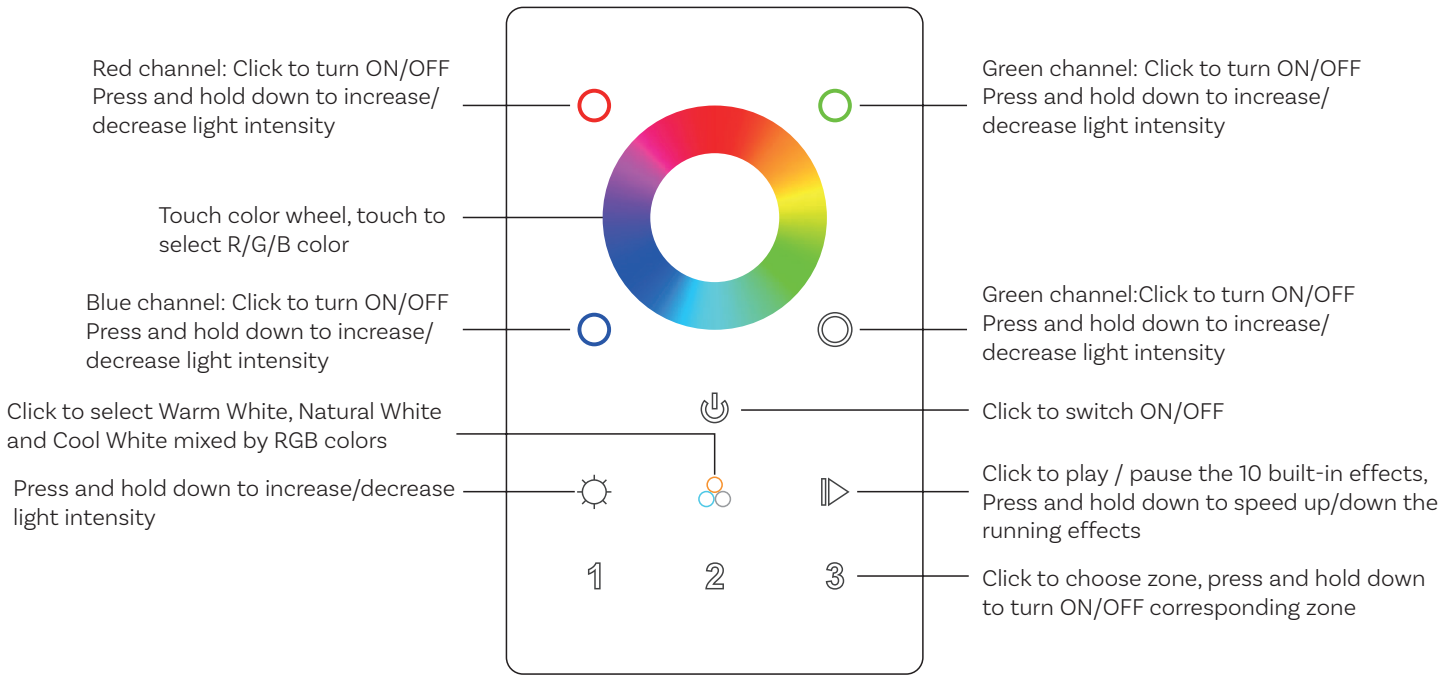

FRONT SIDE

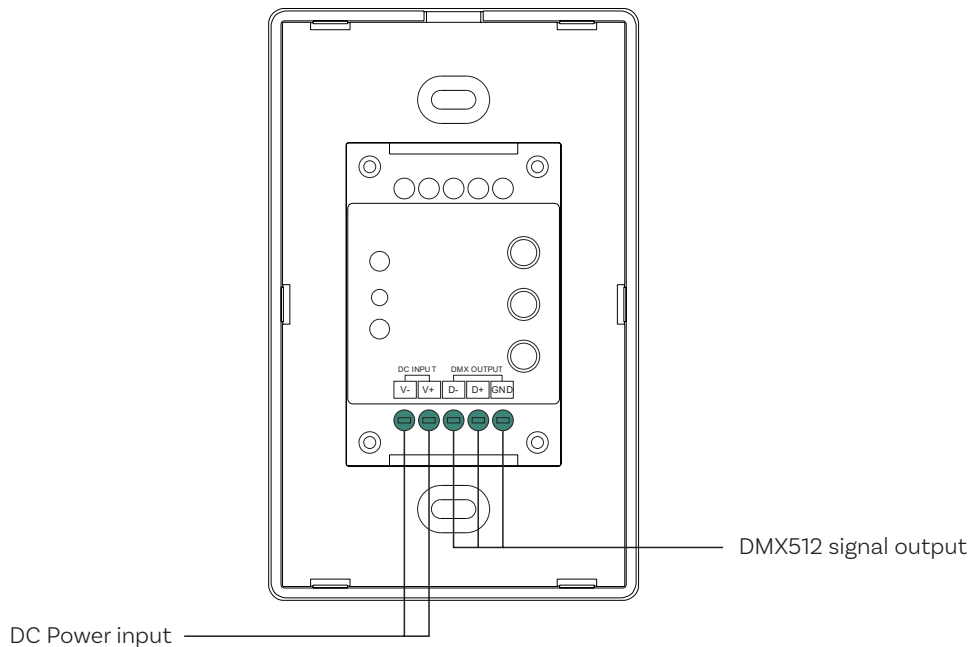

BACK SIDE



RGBW Wall Controller Installation Guide


PRODUCT DATA

Output	DMX512 + RF signal
Power Supply	12-24VDC
Power consumption	<20 mA
Operating Temperature	0 - 40°C
Relative humidity	8% - 80%
Dimensions	2.9" x 4.7" x 1.1"

- Touch sensitive
- Glass interface(white & black)
- Standard DMX512 Signal output
- Can Send RF signal, control the RF receiver
- Radio frequency: 916.5MHz
- Control RGBW color
- Control 3 zones independently
- Waterproof grade: IP20


Safety & Warning

- DO NOT install with power applied to device
- DO NOT expos the device to moisture

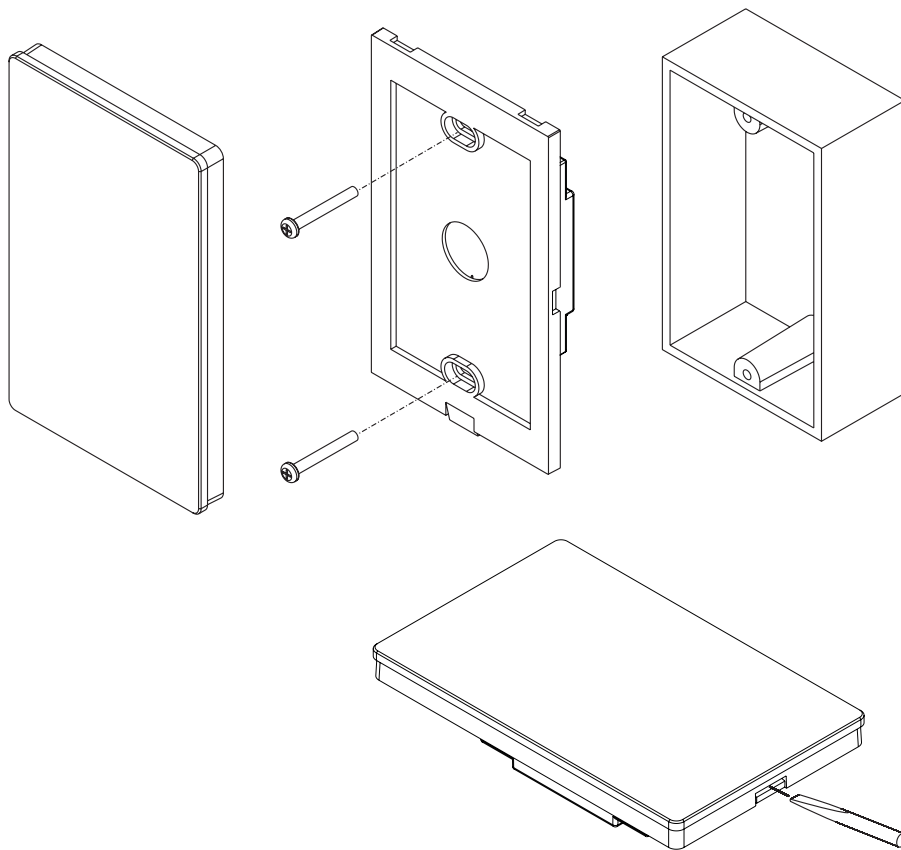

RGBW Wall Controller Installation Guide

WIRE DIAGRAM

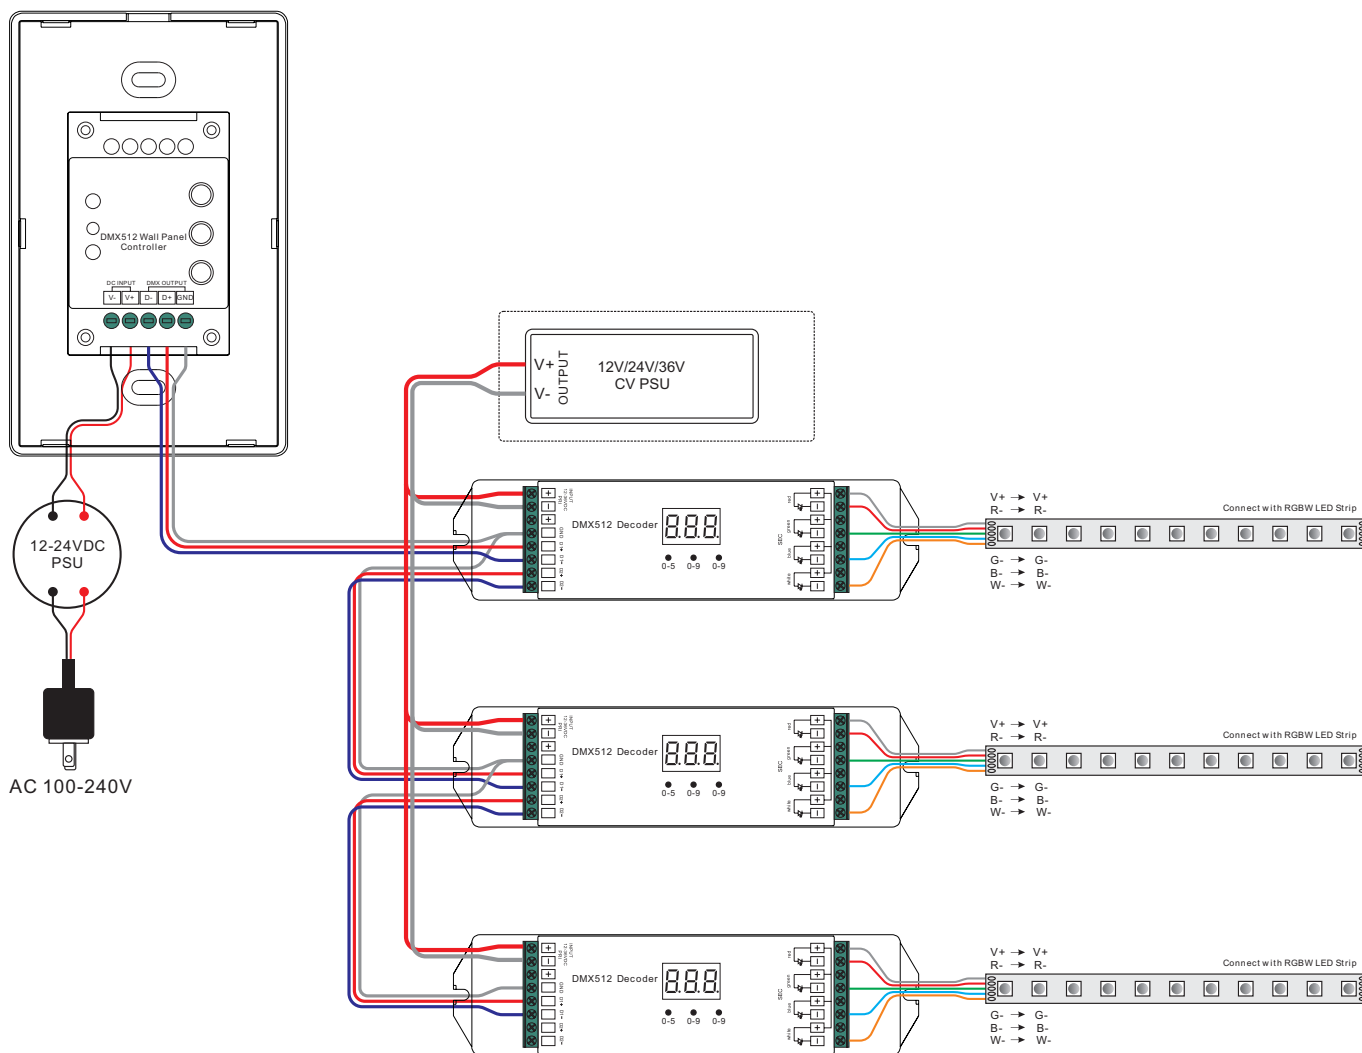

Set DMX Address


This DMX master controller controls 4 zones of DMX decoders by setting DMX decoders' address as follows:

- DMX decoders with address 001 will be controlled by zone 1,
- DMX decoders with address 005 will be controlled by zone 2,
- DMX decoders with address 009 will be controlled by zone 3,

RGBW Wall Controller Installation Guide

PAIR WITH RF RECEIVER (METHOD 1)

Step 1: Do wiring the RF receiver according to wiring diagram
(please refer to the instruction of RF receiver that you would like to pair with)

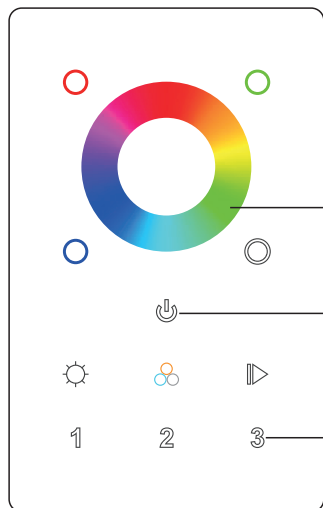


Step 3: Click the “Learning Key” button on RF receiver or re-power on the receiver three times continuously to set it into pairing status

Step 5: Touch the color wheel, LED lights connected with the RF receiver flicker once means the receiver is paired with zone 3 successfully.

Step 2: Touch to turn on the controller, indicator of the controller turned blue

Step 4: Choose and click a zone number(e.g. zone 3)

PAIR WITH RF RECEIVER (METHOD 2)

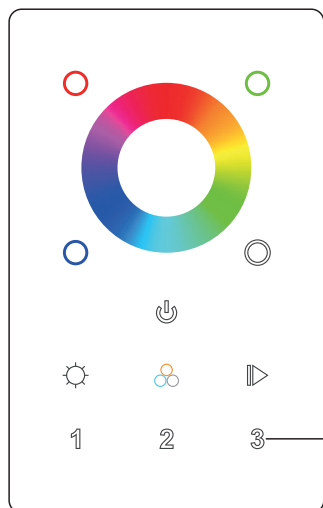

Step 1: Power off and power on the receiver

Step 2: Choose and click a zone number(e.g. zone 3) three times, then press and hold it continuously and quickly within 10 seconds, LED lights connected with the RF receiver flicker once means the receiver is paired with zone 3 successfully.