


PREPARED BY:  
PROJECT:  
TYPE:



# 24W 2835 SERIES

## STRIP LIGHTS

The Strip Light Series brings forward a contemporary and versatile sector of lighting. Optimal varieties of wattage and color temperatures are at the ready, in order to make any application possible. Every Strip Roll is made with the highest attention to detail and quality. Each and every chip is carefully tested to fulfill the Light Blue USA promise to deliver the most elite illumination for your environment.

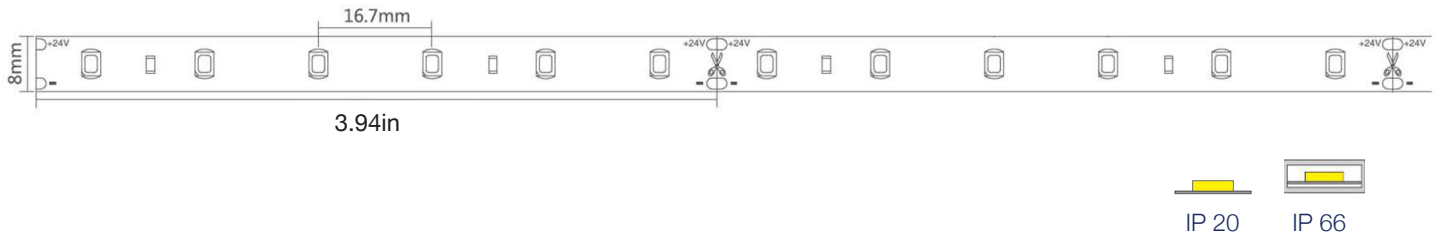

• Wattage	24W	• Dimming	Triac
• Input Power	24V	• Length per Roll	16.4ft / 100ft
• CRI	90+	• Ambient Temperature	-20 °C to 40 °C
• LED Chip	2835	• Height	0.02"
• Environment	IP20 / IP66	• Width	0.30"
• Cutting Interval	3.94"	• Adhesive	3M
• Maximum Run	20ft.	• Warranty	5 years
• Certification	ETL		

### ORDERING GUIDE

Model	Length (ft)	IP Rating	Wattage	Color Temperature	Lumens/ft	Efficacy
LB53123	16.4 ft	IP20		2700K	149lm	99.33lm/W
LB53124				3500K	155lm	103.33lm/W
LB53125				4000K	161lm	107.33lm/W
LB53126				6000K	167lm	111.33lm/W
LB53127	16.4 ft	IP66	24W	2700K	128lm	85.33lm/W
LB53195	100 ft	IP20		3000K	153lm	101.33lm/W
LB53196				3500K	155lm	103.33lm/W
LB53197				4000K	161lm	107.33lm/W


**\*CONTACT FOR STOCK CONFIGURATIONS**

- Runs can not exceed 20 feet per home run
- Maximum driver distance of 20 feet before voltage drop (with 18 gage wire)

**\* COMPATIBLE WITH ELECTRONIC DRIVER ONLY \***



LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



PREPARED BY:

PROJECT:

TYPE:



# 24W 2835 SERIES

## STRIP LIGHTS

### ACCESSORIES

LB55905 - Slim Couplings with Wire



LB55900 - Slim Starters



LB55813 - Clear Starters



LB55814 - Clear Couplings




LB55815 - Clear Couplings with Wire



LB55810 - Starter

LB55811 - Coupling with Wire



LB55812 - Coupling

