

# STRIP LIGHTS

## 72W 5050 Series 12V

### SPECIFICATIONS:

|                     |                           |
|---------------------|---------------------------|
| Wattage             | 4.4 Watts/Foot (14.4 W/M) |
| Input Power         | 72W/16Ft (5M)             |
| Lumen efficiency    | 421 lm/Ft (1380 lm/M)     |
| LED Quality         | 60 LEDs, 0.66" LED Pitch  |
| Voltage (VDC)       | 12 Volt                   |
| Current             | 0.37A/Ft (1.2A/M)         |
| CRI                 | 80 (90/98 Available)      |
| Ambient Temperature | -20°C - 45°C              |
| Humidity            | 40% - 70% RH              |
| Unit Length         | 1.97"/3 LEDs              |
| Dimensions          | 196.85" x 0.39" x 0.08"   |
|                     | 16 Ft. Roll               |



AVAILABLE IP

20



\*ELECTRONIC DRIVER RECOMMENDED

| MODEL # | Color         | Temp  | LUMEN     |
|---------|---------------|-------|-----------|
| LB53170 | Warm White    | 2700K | 380 lm/Ft |
| LB53260 | Warm White    | 3000K | 380 lm/Ft |
| LB53171 | Neutral White | 3500K | 400 lm/Ft |
| LB53172 | Cool White    | 4000K | 420 lm/Ft |

### PRODUCT FEATURES:

- Source by 5050 Top LEDs
- Self-encapsulated design offer five optional white light from 2300-6500K and Red, Green, Blue, Yellow
- CRI 80+ , CRI 90+ and CRI 98+ are available



LISTED




186 Van Dyke Street - Brooklyn, NY 11231  
www.lightblueusa.com 718-475-2515




# STRIP LIGHTS

## 72W 5050 Series 12V


Luminous Intensity Distribution Diagram

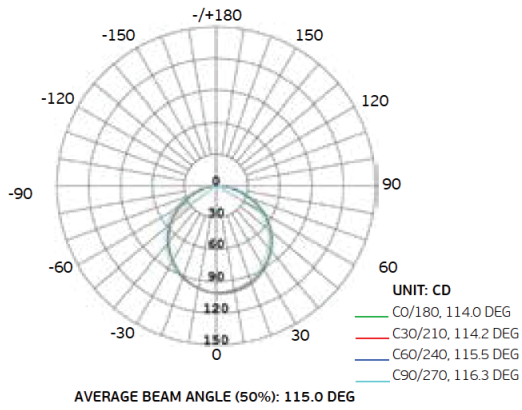

Co Plane Isolux Diagram Unit: LX

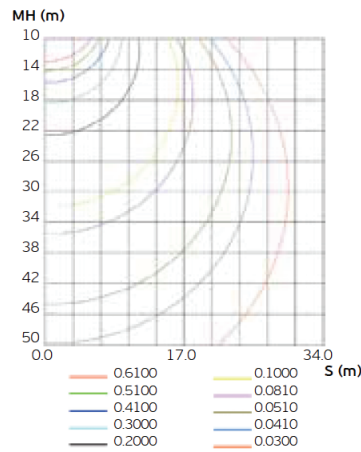

Average Illuminance Curve

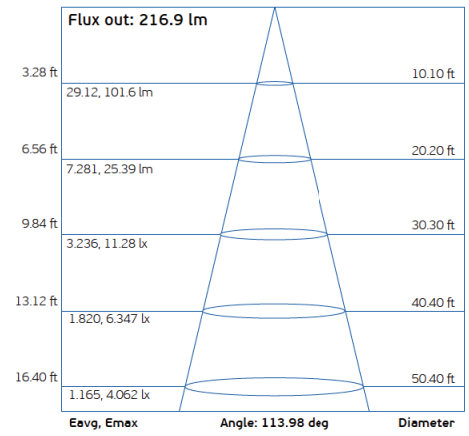

### Assembly & Measurement

