

## 1.5 SERIES SCOB

LED STRIP LIGHT 1.5W/FT

PROJECT:

PREPARED BY:

DATE:

TYPE:



## 1.5W / FT

## SCOB Chip

The SCOB Series LED Strip Light is engineered for sleek, low-profile installations where visual comfort and high performance matter. Powered by advanced SCOB (Silicon Chip on Board) technology, this strip delivers up to 200 lumens per foot with high efficacy and a CRI of 90+, ensuring rich, accurate color rendering. Available in multiple CCT options and IP20 rating, the SCOB Series is an ideal choice for accent, cove, and architectural lighting in indoor environments. With its ultra-tight 1.23" cutting increments and clean, dot-free output, it offers precision and flexibility for refined lighting applications

Ideal for ambient lighting applications, this solution delivers a soft yet effective glow—perfect for cove details, ceiling integrations, and layered architectural compositions

## PERFORMANCE

• Wattage	1.5W/FT	• Maximum Run	20FT
• Input Power	24V	• Certification	UL / ETL
• CRI	90	• Dimming	Triac
• LED Chip	SCOB	• Warranty	5 years

## DIMENSIONS

• Length per Roll	20FT
• Height x Width	0.3" x 1.23"

## INSTALLATION

• Environment	IP20	• Adhesive	3M
• Cutting Interval	1.23"	• Ambient Temperature	-20°C to 40°



## 1.5 SERIES SCOB

LED STRIP LIGHT 1.5W/FT

PROJECT:

PREPARED BY:

DATE:

TYPE:



### ORDER GUIDE

Model	Length (ft)	Wattage	CCT	Lumens/FT	Efficacy	IP Rating
LB53370	20FT	1.5W/FT	2700K	191LM	127LM/W	IP20
LB53371	20FT	1.5W/FT	3000K	194LM	129LM/W	IP20
LB53372	20FT	1.5W/FT	3500K	200LM	133LM/W	IP20
LB53373	20FT	1.5W/FT	4000K	197LM	131LM/W	IP20

- Run can not exceed 20 feet per home run
- Maximum driver distance of 20 feet before voltage drop (with 18 gage wire)

## 1.5 SERIES SCOB

LED STRIP LIGHT 1.5W/FT


PROJECT:

PREPARED BY:


DATE:

TYPE:


### TRANSPARENT CLAMP ACCESSORIES

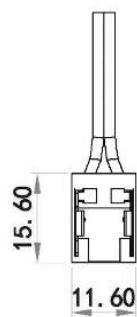

LB55813  
Starter



LB55814  
Coupling

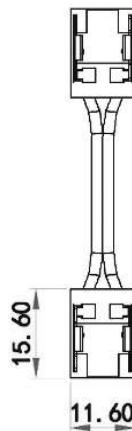

LB55815  
Coupling with Wire

## 1.5 SERIES SCOB

LED STRIP LIGHT 1.5W/FT

PROJECT:

PREPARED BY:

DATE:

TYPE:

### COMPATIBLE DIRVER



Model	LB55500
Wattage	120W
Dimensions	7.4" x 3.7" x 1.7"
Temperature	IP67
Dimming	Triac/MLV/ELV



Model	LB55460
Wattage	30W
Dimensions	12" x 2.4" x 1.4"
Temperature	IP67
Dimming	Triac/MLV/ELV



Model	LB55501
Wattage	200W
Dimensions	9.4" x 4" x 1.7"
Temperature	IP20
Dimming	Triac/MLV/ELV



Model	LB55462
Wattage	60W
Dimensions	12" x 2.4" x 1.4"
Temperature	IP67
Dimming	Triac/MLV/ELV



Model	LB55502
Wattage	300W
Dimensions	10" x 4.3" x 1.7"
Temperature	IP20
Dimming	Triac/MLV/ELV



Model	LB55464
Wattage	96W
Dimensions	12" x 2.4" x 1.4"
Temperature	IP67
Dimming	Triac/MLV/ELV

## 1.5 SERIES SCOB

LED STRIP LIGHT 1.5W/FT



PROJECT:

PREPARED BY:


DATE:

TYPE:


## COMPATIBLE ALUMINUM CHANNEL

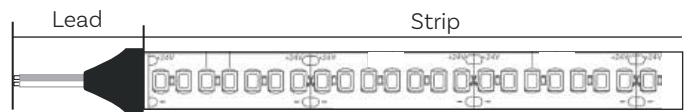


ALP 001	IP20 Strip	IP65 Strip
Strip ✓	Strip ✓	Lead ✗
Lead ✓	Lead ✗	




ALP 013	IP20 Strip	IP65 Strip
Strip ✓	Strip ✓	Lead ✗
Lead ✓	Lead ✓	




ALP 002	IP20 Strip	IP65 Strip
Strip ✓	Strip ✓	Lead ✗
Lead ✓	Lead ✗	




ALP 014	IP20 Strip	IP65 Strip
Strip ✓	Strip ✓	Lead ✗
Lead ✓	Lead ✓	




ALP 003	IP20 Strip	IP65 Strip
Strip ✓	Strip ✓	Lead
Lead ✓	Lead	



ALP 103	IP20 Strip	IP65 Strip
Strip ✓	Strip ✓	Lead ✗
Lead ✓	Lead	



ALP 004	IP20 Strip	IP65 Strip
Strip ✓	Strip ✓	Lead
Lead ✓	Lead	



ALP 113	IP20 Strip	IP65 Strip
Strip ✓	Strip ✓	Lead
Lead ✓	Lead	




ALP 006	IP20 Strip	IP65 Strip
Strip ✓	Strip ✓	Lead
Lead ✓	Lead	



ALP 114	IP20 Strip	IP65 Strip
Strip ✓	Strip ✓	Lead ✗
Lead ✓	Lead	




ALP 007	IP20 Strip	IP65 Strip
Strip ✓	Strip ✓	Lead ✗
Lead ✓	Lead ✗	



ALP 158	IP20 Strip	IP65 Strip
Strip ✓	Strip ✓	Lead
Lead ✓	Lead	



ALP 008	IP20 Strip	IP65 Strip
Strip ✓	Strip ✓	Lead ✗
Lead ✓	Lead ✗	



ALP 159	IP20 Strip	IP65 Strip
Strip ✓	Strip ✓	Lead ✗
Lead ✓	Lead	

## 1.5 SERIES SCOB

LED STRIP LIGHT 1.5W/FT

PROJECT:

PREPARED BY:

DATE:

TYPE:

 **Cautions**
**SAFETY PRECAUTIONS****Use as directed**

This product serves exclusively lighting purposes and may:

- > Only be operated using a suitable driver
- > Only be used in dry condition:
  - not in damp or dirt-endangered rooms.
  - not in areas of high air humidity.
- > Not be exposed to strong mechanical loads or to strong contamination.
- > Only be installed and operated after a condition inspection if the product is dirty or has been moistened through storage
- > Not be modified or converted.

If these points named above are not adhered to, a short circuit or electrical shock may occur!

## Installation

The complete installation must be done by an electrical expert or a specialized maintenance team, who is familiar with valid directives.

**IP20**

Do not press the surface of LED



Pay attention to damp-proof and dustproof

**Attention: Switch off power of the mains supply or respectively of the connection lead before doing any works.**

Use only parts, which are supplied with the product or are described as accessories! Otherwise, the product or the installation might not be sufficiently safe!

Indication for the installer: In case you do not install a completely supply system (with transformer), you are considered a "manufacturer" by the low-voltage directive. In this case you are required to ensure the conformity of the whole system and declare it by attaching the CE-sign.

## Installation place

Make sure that the product is mounted on a stable, even and tilt-fixed background. Note the minimum distances in the ceiling.

**Attention: Do not cover the product, especially not with insulating materials.**

## Operation- Information for the user

Operate the product only if it is working correctly. Switch off the product with malfunction immediately and operate it again only after examination by an electrical specialist. This is the case, when:

- > Visible damages appear.
- > The product does not work.
- > Smoke, steam or crackling sounds appear.
- > An overheating is recognizable

Repairs of the product or work on mains voltage-prominent sections may only be carried out by qualified electricians.

**Attention: Here exists mortal danger from an electric shock!**

## How to avoid failure or fire risk

- > Do not cover the product- provide free air circulation!
- > Do not hang or fasten anything on the product, especially no decoration!
- > Never let children play unsupervised with electric products!

Children can not always estimate dangers in dealing with electric energy correctly.

Disconnect the product from power, before you...

- > Clean or maintain the product.
- > Do any works on the product or its components (electric expert).

**Attention: Do not place in the environment which includes strong acid and strong base.**

LED get vulcanized, LED strip should be installed in the environment where does not have oil and corrosive substances. Such as these substances which contain Sulphur, Bromine, Iodine and Chlorine. Some other chemical elements which will cause aromatic hydrocarbons releasing (such as methylbenzene, xylene, methyl acetoacetate ethyl acetate, etc.)