SLIM DOWNLIGHTS

4" DOWNLIGHT SLIM PANEL ROUND

SPECIFICATIONS:	
Wattage	12W
Recessed Downlight Size	4"
Lumen Output	850 lm
Input power	120V
Efficacy	>72 lm/W
Freequency	50/60 Hz
Dimming	Triac
Beam Angle	110 Degree
Life Time	50000 hrs


120V APPROVED DIMMERS		
Lutron	TGCL-153PH LGCL-153PH MACL-153M DVCL-153P CTCL-153P	
Levitron	6672 6674 IPL06	
Pass & Seymour	HCL453P	
Cooper	SAL06P	
Consult technical service or factory for additional dimmers		

MODEL #	ССТ
LB11345	3000K
LB11380	3500K
LB11344	4000K

wet

Intertek



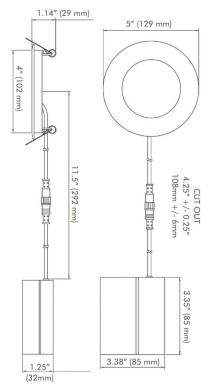

Available Trim Options:





1421 Locust Avenue - Brooklyn, NY 11230 www.lightblueusa.com 718-475-2515



SLIM DOWNLIGHTS

4" DOWNLIGHT SLIM PANEL ROUND


Optional New Construction Plate for the 4in Slim Downlight:


PRODUCT FEATURES: General

Constructed of galvanized steel, this 4.25" round opening pre-mounting plate is used to mount our 4 inch SLIM DOWNLIGHTS.

Mounting

The plate includes mounting holes and tracks to satisfy any type of installation. Alignment notches on plate to help aligning multiple plates.

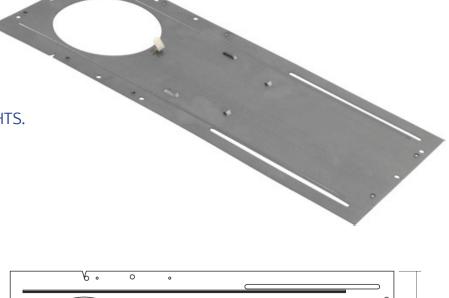

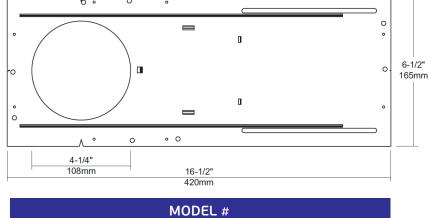

MODEL # LB15150

1421 Locust Avenue - Brooklyn, NY 11230 www.lightblueusa.com 718-475-2515

