




# LINEAR PENDANT LIGHT FIXTURE

## LED Linear Pendant Light

### SPECIFICATIONS:

Wattage	40 Watts/ 4Ft
Delivered Lumens	4400lm
Dimming Option	0-100 Dimmable LED driver
CCT	3000K- 4000K
Voltage	120-277V/60Hz
CRI	85
Lifetime	50,000 hours
Warranty	3 years
Dimensions	45.8" x 2.64" x 2.95"

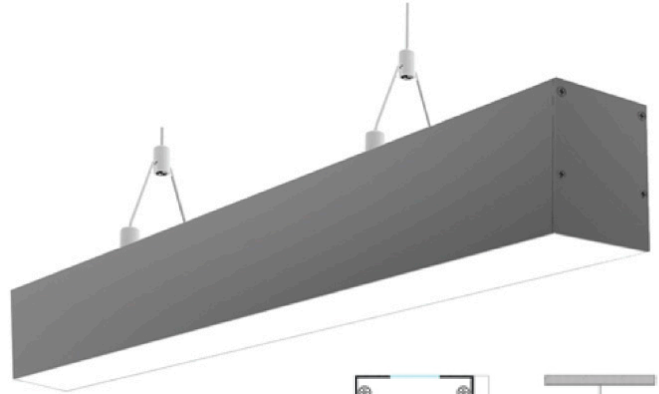

### Black Finish- up/ down

MODEL #	Wattage	Temp	LUMEN
LB85220-3K-BK	40W	3000K	4400
LB85220-4K-BK	40W	4000K	4550

### White Finish- up/ down

MODEL #	Wattage	Temp	LUMEN
LB85220-3K-WT	40W	3000K	4400
LB85220-4K-WT	40W	4000K	4550

### Black Finish- down

MODEL #	Wattage	Temp	LUMEN
LB85215-3K-BK	40W	3000K	4400
LB85215-4K-BK	40W	4000K	4550

### White Finish- down

MODEL #	Wattage	Temp	LUMEN
LB85215-3K-WT	40W	3000K	4400
LB85215-4K-WT	40W	4000K	4550

Available trim options:

White



Black



### PRODUCT FEATURES:

- Direct & indirect light
- Milky white lens with 100° beam spread
- Available in white, black and anodizing finish options
- IP 40 offers extra protection for school applications
- Special optical design achieves high efficacy
- More energy saved thanks to control options, including presence/absence detection and daylight dimming
- Approved for dry/damp location




1421 Locust Avenue - Brooklyn, NY 11230  
 www.lightblueusa.com 718-475-2515




# LINEAR PENDANT LIGHT FIXTURE

## LED Linear Pendant Light


Luminous Intensity Distribution Diagram

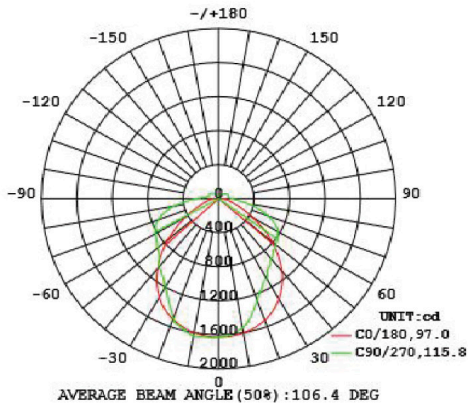


Co Plane Isolux Diagram Unit: LX

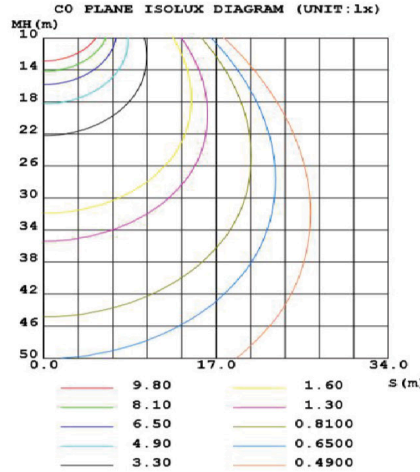


### Available corner options




V-SHAPED CONNECTION



Y-SHAPED CONNECTION





L-SHAPED CONNECTION



T-SHAPED CONNECTION

### Installation

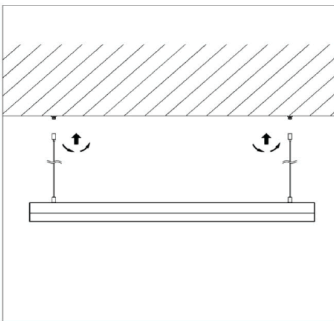

### WARNINGS:

1. Installation and maintenance must be completed by electricians or professionals.
2. Please cut off the power before installation and maintenance.
3. The thermally insulating material is not allowed to cover the fixture.
4. Please keep away from the corrosive substance and keep the fixture dry and clean.

Working temperature: -20°C~50°C

Storage temperature: -20°C~40°C



Suitable for Damp Locations

1421 Locust Avenue - Brooklyn, NY 11230  
www.lightblueusa.com 718-475-2515

