


LED STRIP LIGHT 3W/FT

PROJECT:
PREPARED BY:

DATE:

TYPE:

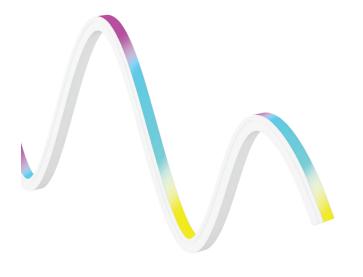

3W/FT

Neon

The Neon RGB Vertical Bend LED Strip is a flexible, IP67-rated lighting solution designed for smooth, top-bending installations. Built with high-efficacy 2835 SMD chips, it delivers up to 335 lumens per foot with a CRI of 90+, ideal for outlining curves, coves, and architectural edges with a soft, uniform glow. Its fully encapsulated body ensures durability in indoor and outdoor environments, while factory-sealed custom cuts and multiple cable outlet directions support tailored project needs

Ideal for ambient lighting applications, this solution delivers a soft yet effective glow—perfect for cove details, ceiling integrations, and layered architectural compositions

PERFORMANCE

• Wattage	3W/FT	Maximum Run	16.4FT
• Input Power	24V	 Certification 	UL / ETL
• CRI	90+	 Dimming 	Triac
• LED Chip	2835	Warranty	5 years

Ambient Lighting

DIMENSIONS


 Length per Roll 	16.4FT

• Height x Width 0.39" x 0.39"

INSTALLATION

 Environment 	IP67	 Adhesive 	ЗМ

• Cutting Interval 3.29" • Ambient Temperature -20°C to 40°



186 Van Dyke Street - Brooklyn, NY 11231

Light Blue USA & Associates LLC

www.lightblueusa.com

718-475-2515

Revision Date 5/15/25




LED STRIP LIGHT 3W/FT

PROJECT:

PREPARED BY:

DATE:

TYPE:



ORDER GUIDE

Model	Length (ft)	Wattage	ССТ	Lumens/FT	IP Rating
LB53515	16.4FT	3W/FT	RGB	120LM	IP67

- · All cuts must be made directly on line indication
- · Any cuts made in field must be properly sealed in order to be IP67 rated



LED STRIP LIGHT 3W/FT


PROJECT:


PREPARED BY:

DATE:

TYPE:

DIMENSION AND OUTLET DIRECTION

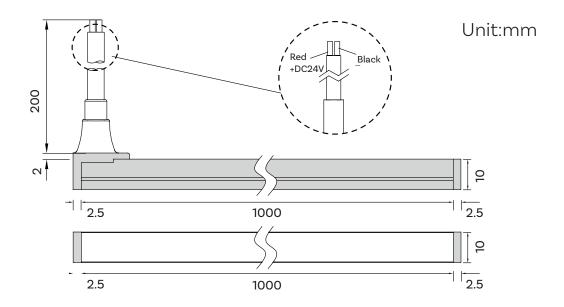

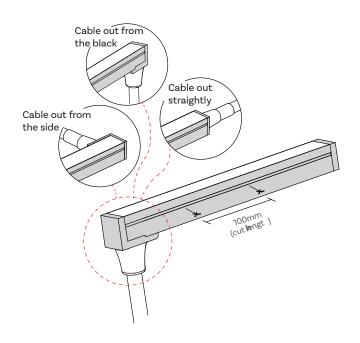



LED STRIP LIGHT 3W/FT

PROJECT:

PREPARED BY:

DATE:

TYPE:

CONNECTIG ACCESSORIES


LB53537 - Clear End Cap





LB53536 - Coupling





LB53540 - End Straight





LB53541 - End side left





LB53542 - End side right





LB53543 - End bottom





LB53539 - Aluminum Buckle


12Â 12.5Â 25mm



Screw 15â 3.5mm




LengthS	Buckle	crew
1000mm	4pcs	4pcs






LB53538 - Aluminum Profile



	LengthS	crew
Aluminum profile	2440mm	10pcs





186 Van Dyke Street - Brooklyn, NY 11231

Light Blue USA & Associates LLC

www.lightblueusa.com

718-475-2515

Revision Date 5/15/25



LED STRIP LIGHT 3W/FT

COMPATIBLE DIRVER

Pr. Lasson have freeze to the property of the

Model LB55500
Wattage 120W
Dimensions 7.4" x 3.7" x 1.7"
Temperature IP67
Dimming Triac/MLV/ELV



ModelLB55501Wattage200WDimensions9.4" x 4" x 1.7"TemperatureIP20DimmingTriac/MLV/ELV



Model LB55502
Wattage 300W
Dimensions 10" x 4.3" x 1.7"
Temperature IP20
Dimming Triac/MLV/ELV



PREPARED BY:

DATE:

TYPE:



Model LB55460
Wattage 30W
Dimensions 12" x 2.4" x 1.4"
Temperature IP67
Dimming Triac/MLV/ELV



ModelLB55462Wattage60WDimensions12" x 2.4" x 1.4"TemperatureIP67DimmingTriac/MLV/ELV



Model LB55464
Wattage 96W
Dimensions 12" x 2.4" x 1.4"
Temperature IP67
Dimming Triac/MLV/ELV



LED STRIP LIGHT 3W/FT

PROJECT:


PREPARED BY:

DATE:


TYPE:


INSTALLATION ACCESSORIES

Light Profile




Bending Direction






Correct Bending Way



Face to the light surface fold the strip, the minimum bending diameter is 100mm.



Light surface upwards, the strip is bendable to right or left naturally, the minimum bending diameter is 100mm.

Incorrect Bending Way



Face to the side surface (as the picture shows) . Do not bend sideward to damage the strip .



Face to the side surface (as the picture shows). Do not bend upward to damage the strip.



(as the picture shows) please do not twist the strip, or it will be damaged.