

SINGLE T5 INTEGRATED TUBE LIGHT

SPECIFICATIONS:

Input Voltage	AC100 - 277V
LED Luminous Efficiency	80±5% Lm/W
Power Effective	88%
Beam Angle	120°
Lifetime	50000 hrs


MODEL #	WATTAGE	CCT	LENGTH	LUMEN
LB41202	4W	3000K	1 ft (11.7in)	400 lm
LB41206	7W	3000K	2 ft (22in)	700 lm
LB41210	12W	3000K	3 ft (34in)	1200 lm
LB41215	15W	3000K	4 ft (46in)	1500 lm
LB41220	20W	3000K	5 ft (59in)	2000 lm
LB41225	22W	3000K	6 ft (70.8in)	2200 lm
LB41230	30W	3000K	8 ft (90in)	3000 lm

MODEL #	WATTAGE	CCT	LENGTH	LUMEN
LB41201	4W	4000K	1 ft (11.7in)	400 lm
LB41205	7W	4000K	2 ft (22in)	700 lm
LB41209	12W	4000K	3 ft (34in)	1200 lm
LB41214	15W	4000K	4 ft (46in)	1500 lm
LB41219	20W	4000K	5 ft (59in)	2000 lm
LB41224	22W	4000K	6 ft (70.8in)	2200 lm
LB41229	30W	4000K	8 ft (90in)	3000 lm




SINGLE T5 INTEGRATED TUBE LIGHT

LIGHT DISTRIBUTION CURVE:

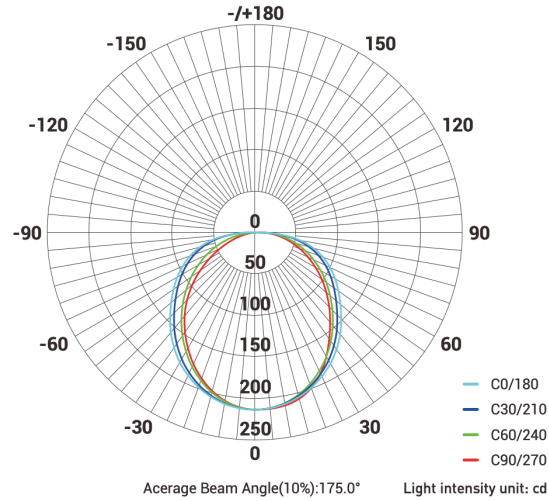


INSTALLATION GUIDE:

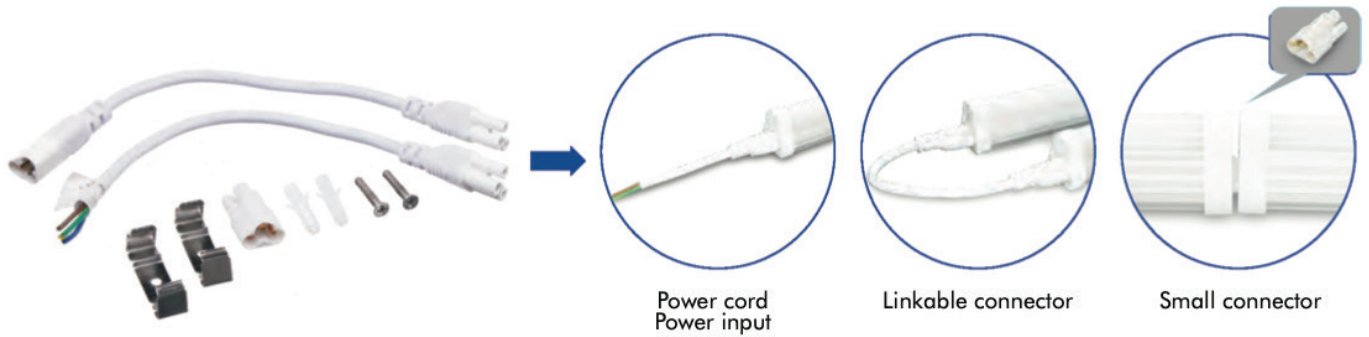


STEP1: Place the clip kit and screws correctly.



STEP2: Fix the LED tube to the ceiling or wall.

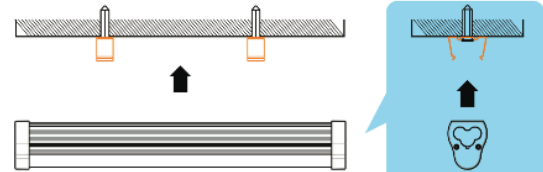

STEP3: Connect the power cord to the integrated tube.

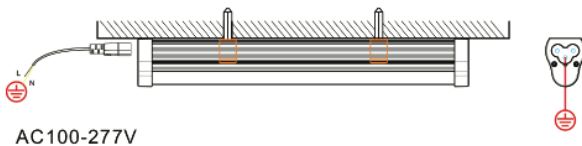

STEP3: Connect up by linkable connector.

