4” Round Slim Recessed Downlight

DOWNLIGHT SERIES

PROJECT:

PREPARED BY:

DATE:

TYPE:



FEATURE

- Edge-lit technology
- No existing recessed housing required
- Dimming: Traic down to 10%
- IC Rated for direct contact with insulation
- Suitable for wet location
- 50,000 Lifetime
- 5CCT Selectable
- Compatible with 12-2 / 12-3 BX and MC Cable
- Maximum amount of 4 12AWG or 6 14AWG per Driver (Excluding Factory Installed Conductor)

PERFORMANCE

Wattage	9W
Input Power	120V
Size	4.11”
Lumen	900LM
5îîůÚÍÚň	100M/W
1ů č čůĎï	Triac
Power Factor	>0.9

Frequency	50/60Hz
Beam Angle	120˚
CRI	90Ra
Environment	Wet Location
Operating Temperature	-20˚ to 40˚
Certification	FCC, ETL
Lifetime	50,000hrs
Warranty	5 Years

ORDERING GUIDE

Model	Size	Wattage	Lumen	Color Temperature	Trim Finish
LB11453	4”	9W	900LM	27K/30K/35K/40K/50K 5CCT Selectable	White

Model	Description
LB11550	Black Trim
LB15156	New Construction Plate

Information on Spec sheets or other supportive files may be modified at any given time

4” Round Slim Recessed Downlight

DOWNLIGHT SERIES


PROJECT:

PREPARED BY:


DATE:

TYPE:

DIMENSION

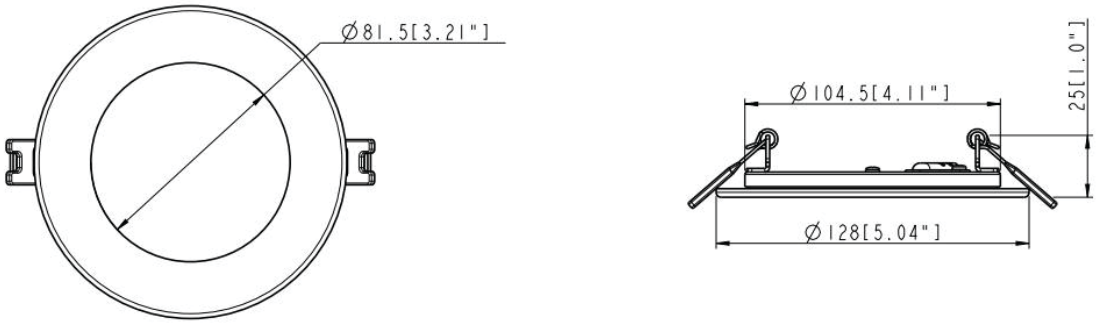

CONSTRUCTION PLATE

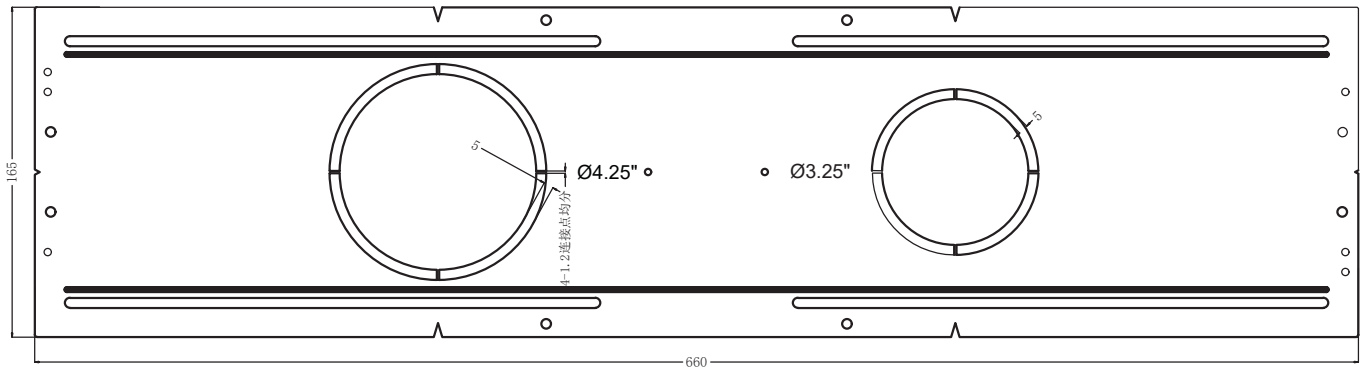

MODEL: LB15156

- General: Constructed of galvanized steel, this 4.25” round opening pre-mounting plate is used to mount our 4 inch slim downlight.

- Mounting: The plate includes mounting holes and tracks to satisfy any type of installation. Alignment notches on plate to help aligning multiple plates.

4" Round Slim Recessed Downlight

DOWNLIGHT SERIES

PROJECT:

PREPARED BY:

DATE:

TYPE:

DIMMER COMPATIBLE LIST

BRAND	SERIES	MODEL	LOAD
LUTRON	SKYLARK CONTOUR	LECL-153P	150W
		CTCL-150H	150W
		LGCL-153PLH	150W
		CTCL-153P	150W
		SCL-153P	150W
		S-600P	600W
	CASETA	PD-6WCL	150W
		PD-5NE	150W
		PD-10NXD	250W
	DIVA	DVCL-153P	150W
	TOGGLER	TGCL-153P	150W
	ARIADNI	AYCL-153P	150W
	MAESTRO	MACL-153M	600W
LEVITON	ILLUMATECH	IPL06	150W
	SURESLIDE	6672	150W
		6674	150W
EATON	SMART DIMMER	AAL06	300W
PASS & SEYMOUR	HARMONY	DCL453PTCCCV6	150W
GE	ROCKER	10464	150W
	TOGGLE	18027	150W