


NEON TOP VIEW

STRIP LIGHTS

The Neon Strip Lights bring forth a new era of illumination. The Top view and Side view options enable endless application concepts to come to life. Seamless solid light emanates uninterrupted by spacing between standard chips. Field cuttable and IP67 rated. ETL certified with a 5 year warranty.

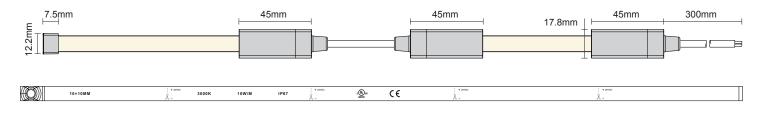

| • Wattage | 3W/ft | • Dimming | Triac |
|------------------|-------|--|-----------------|
| • Input Power | 24V | Length per Roll | 16.4ft. |
| • CRI | 90+ | Ambient Temperature | -20 °C to 40 °C |
| • LED Chip | 2835 | • Height | 0.39" |
| • Environment | IP67 | • Width | 0.39" |
| Cutting Interval | 3.93" | Warranty | 5 years |
| Maximum Run | 20ft. | Beam Angle | 120° |
| Certification | ETL | * COMPATIBLE WITH ELECTRONIC DRIVER ONLY * | |


ORDERING GUIDE

-

| Model | Length (ft) | Wattage | Color Temp | Lumens | Efficacy | Forward Current |
|---------|-------------------|---------|------------|----------|----------|-----------------|
| LB53509 | Max 16.4 ft 3W/ft | 3W/ft | 2700K | 222lm/ft | 91lm/W | 600 mA/ft |
| LB53510 | | | 3000K | 290lm/ft | 95lm/W | |
| LB53512 | | | 3500K | 296lm/ft | 97lm/W | |
| LB53511 | | 4000K | 305lm/ft | 100lm/W | | |

*CONTACT FOR STOCK CONFIGURATIONS

- Full roll or custom cut options
- Custom length cuts are sealed and secured at our facility
- All cuts must be made directly on line indication
- Any cuts made in field must be properly sealed in order to be IP67 rated

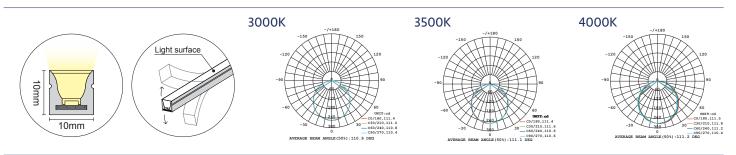





NEON TOP VIEW

STRIP LIGHTS

Dimension and Outlet Direction

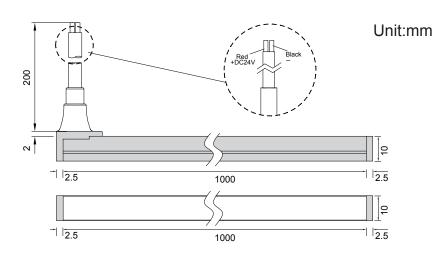

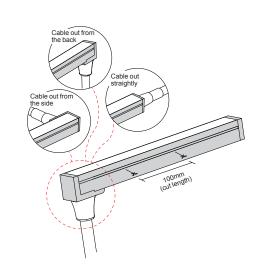

Connecting Accessories (IP65)


LB53537 - Clear End Cap





LB53536 - Coupling





LB53540 - End-straight





LB53541 - End-side left





LB53542 - End-side right





LB53543 - End-bottom







NEON TOP VIEW

STRIP LIGHTS

Installation Accessories



12×12.5×25mm

Screw 15×3.5mm

Screw 15×3.5mm













Aluminum profile

12×12.5×2440mm



| 12mm |
|----------------|
| A > |
| _ |








Neon LED Strip instruction and caution

Light Profile




Bending Direction






Correct Bending Way



Face to the light surface fold the strip, the minimum bending diameter is 100mm.



Light surface upwards, the strip is bendable to right or left naturally, the minimum bending diameter is 100mm.

Incorrect Bending Way



Face to the side surface (as the picture shows). Do not bend sideward to damage the strip.



Face to the side surface (as the picture shows). Do not bend sideward to damage the strip.



(as the picture shows) please do not twist the strip, or it will be damaged.