


PREPARED BY:
PROJECT:
TYPE:



48W 3528 SERIES

STRIP LIGHTS

The Strip Light Series brings forward a contemporary and versatile sector of lighting. Optimal varieties of wattage and color temperatures are at the ready, in order to make any application possible. Every Strip Roll is made with the highest attention to detail and quality. Each and every chip is carefully tested to fulfill the Light Blue USA promise to deliver the most elite illumination for your environment.

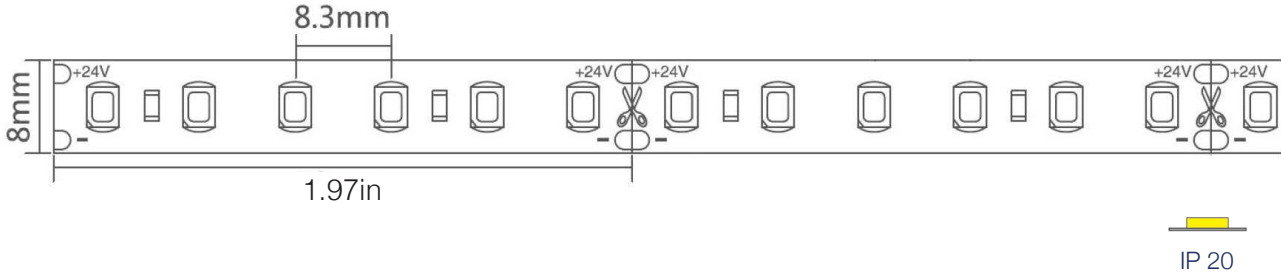

• Wattage	3W/FT	• Dimming	Triac
• Input Power	24V	• Length per Roll	16.4ft / 100ft
• CRI	80	• Ambient Temperature	-20 °C to 40 °C
• LED Chip	3528	• Height	0.02"
• Environment	IP20	• Width	0.30"
• Cutting Interval	1.97"	• Adhesive	3M
• Maximum Run	20ft.	• Warranty	5 years
• Certification	UL / ETL		

ORDERING GUIDE

Model	Length (ft)	IP Rating	Wattage	Color Temperature	Lumens/ft	Efficacy
LB53120	16.4 ft 100 ft	IP20	48W	2700K	262lm	87lm/W
LB53265				3000K	283lm	94lm/W
LB53121				3500K	288lm	96lm/W
LB53188				4000K	293lm	97lm/W
LB53122				6000K	290lm	96lm/W


*2700K AND 6000K ONLY AVAILABLE IN 16.4 FT

**CONTACT FOR STOCK CONFIGURATIONS

- Runs can not exceed 20 feet per home run
- Maximum driver distance of 20 feet before voltage drop (with 18 gage wire)

ΕΩΤ ÚÆ/ΩŠÒÁ QP ÆŠÒÒVÜU P ÆÖÜQÒÜÁ P ŠÿÆ

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



PREPARED BY:

PROJECT:

TYPE:



48W 3528 SERIES

STRIP LIGHTS

ACCESSORIES

LB55905 - Slim Couplings with Wire



LB55900 - Slim Starters




LB55813 - Clear Starters



LB55814 - Clear Couplings




LB55815 - Clear Couplings with Wire

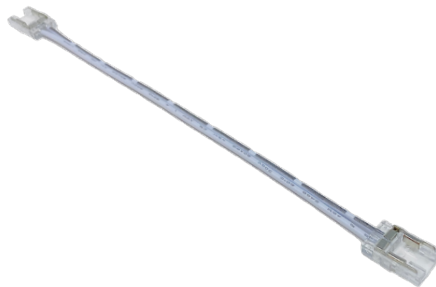

LB55810 - Starter

LB55811 - Coupling with Wire



LB55812 - Coupling

