

PREPARED BY:

PROJECT:


TYPE:



90W 2835 SERIES

STRIP LIGHTS

The Strip Light Series brings forward a contemporary and versatile sector of lighting. Optimal varieties of wattage and color temperatures are at the ready, in order to make any application possible. Every Strip Roll is made with the highest attention to detail and quality. Each and every chip is carefully tested to fulfill the Light Blue USA promise to deliver the most elite illumination for your environment.

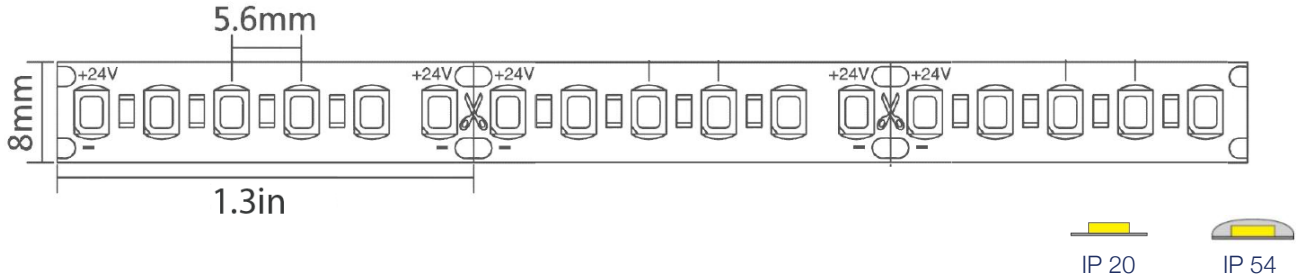

• Wattage	5.5W/FT	• Dimming	Triac
• Input Power	24V	• Length per Roll	16.4ft.
• CRI	80	• Ambient Temperature	-20 °C to 40 °C
• LED Chip	2835	• Height	0.02"
• Environment	IP20 / IP54	• Width	0.30"
• Cutting Interval	1.3"	• Adhesive	3M
• Maximum Run	20ft.	• Warranty	5 years
• Certification	UL / ETL		

ORDERING GUIDE

Model	Length (ft)	IP Rating	Wattage	Color Temperature	Lumens/ft	Efficacy
LB53184	16.4 ft	IP20	5.5W/ft	2700K	576lm	104lm/W
LB53191				3500K	617lm	112lm/W
LB53185				4000K	655lm	119lm/W
LB53192				6000K	658lm	119lm/W
LB53186	16.4 ft	IP54	5.5W/ft	2700K	576lm	104lm/W
LB53187				4000K	655lm	119lm/W


*CONTACT FOR STOCK CONFIGURATIONS

- Runs can not exceed 20 feet per home run
- Maximum driver distance of 20 feet before voltage drop (with 18 gage wire)

*** COMPATIBLE WITH ELECTRONIC DRIVER ONLY ***



LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



PREPARED BY:

PROJECT:

TYPE:



90W 2835 SERIES

STRIP LIGHTS

ACCESSORIES

LB55905 - Slim Couplings with Wire



LB55900 - Slim Starters




LB55813 - Clear Starters



LB55814 - Clear Couplings




LB55815 - Clear Couplings with Wire

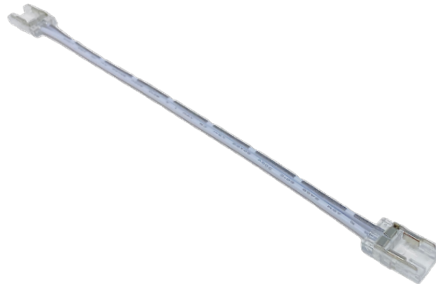

LB55810 - Starter

LB55811 - Coupling with Wire

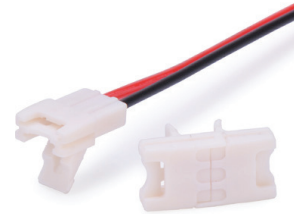

LB55812 - Coupling

