


PREPARED BY:

PROJECT:

TYPE:



# TEMPORARY LED HIGH BAY LIGHT

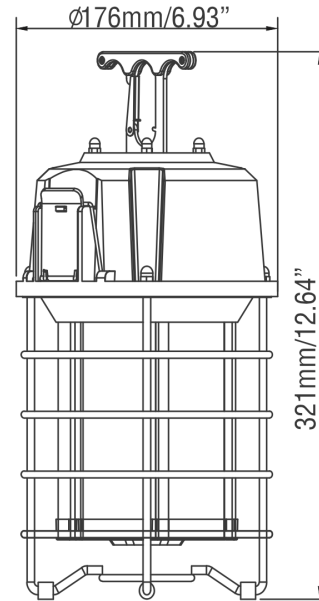

## FEATURES

- 6KV Surge Protection, lamp can bear sudden high voltage.
- Stainless steel guard for impact protection.
- 10ft 16AWG cord with plug suitable to huge construction area.
- Damp location rated.
- Hidden & built-in connector design

## SPECIFICATIONS


• Wattage	100W	• Operating Temperature	-40-45°C
• Input Current	>0.9	• Cord Length	10ft
• Input Voltage	120V	• Beam Angle	360°
• Delivered Light Output	12500lm	• IP Rating	IP65
• Surge Voltage	6000V	• Lamp Life	50,000 hrs.
• CCT	5000K	• Dimensions	6.93" x 12.64"
• CRI	>80	• Warranty	3 years

## ORDERING GUIDE

Model	Wattage	Lumens
LB74101	100W	12500lm

\*CONTACT FOR STOCK CONFIGURATIONS

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



AVERAGE BEAM ANGLE(50%):313.7 DEG

