


PREPARED BY:

PROJECT:

TYPE:



2W IN-GROUND LANDSCAPE SERIES

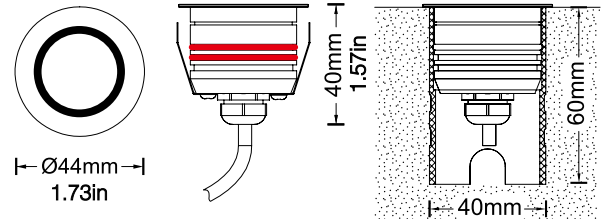

SPECIFICATIONS

• Wattage	2 Watts	• Dimming	Non-Dimmable
• Luminous flux	120lm	• IP rating	IP67 Waterproof
• CCT	3000K	• Trim	Stainless steel 316
• CRI	80+	• Loading Capacity	500 kgs
• Beam angle	120°	• Weight	0.23 kgs
• Dimension	1.73" x 1.57"	• Insulation Class	Class III
• Cut out	1.57in	• Housing & Mounting Sleeve	Passivated (Anodizing)
• Voltage	24V		Aluminum CNC machined


ORDERING GUIDE

LB77120


Model	Wattage	CCT	Lumens	Trim Color	Dimensions
LB77120	2W	3000K	120lm	Brushed Nickel	1.73" x 1.57"
LB77120-W	2W	3000K	120lm	White	1.73" x 1.57"

***NOT COMPATIBLE WITH DIMMABLE DRIVERS**

Light Distribution Curve (3000K, 120°)

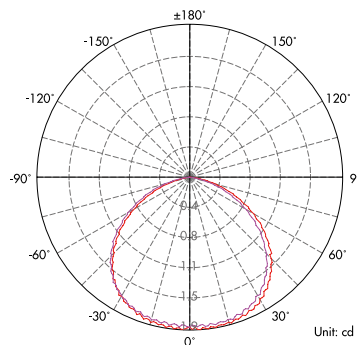

Lux distance Curve (3000K, 120°)

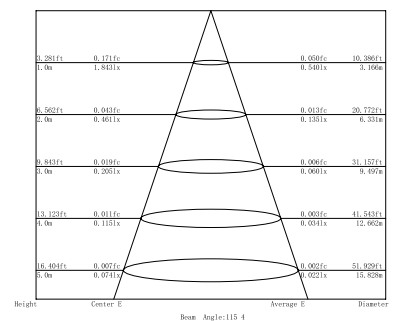


IP67 IK07

PREPARED BY:
PROJECT:
TYPE:



POWER SUPPLIES

LANDSCAPE SERIES

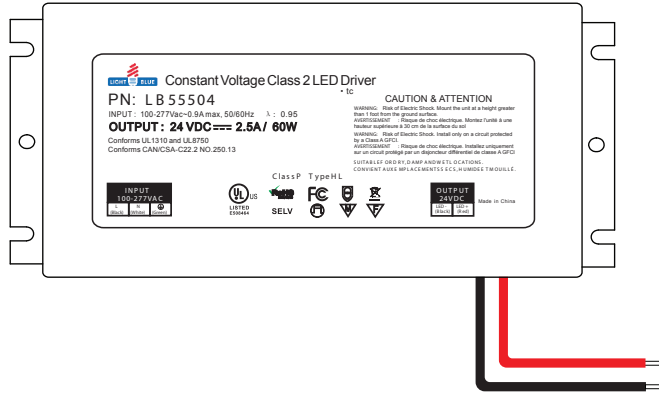

FEATURES

- Output constant voltage
- Built-in PFC function
- Protections: short circuit/ over voltage/ over heat
- Cooling by free air convection
- Flicker-free
- Class 2, Class P, Type HL, CE, UL, FCC compliant
- PWM output, does not change the color index
- Metal housing
- Suitable for dry location
- Strong compatibility
- Suitable for LED lighting and moving sign applications
- Compliance to worldwide safety regulations for lightings.
- Compatible with Forward phase, Reverse phase, Triac, MLV
- 3 years warranty

ORDERING GUIDE

Model	Wattage	Dimming	Voltage	Current	Load Regulation	Dimensions	Weight
LB55504	60W	Non- Dimmable	24V	2.5A	1±	7.4" x 3.6" x 1.02"	2.4 lb
LB55450	120W	Non- Dimmable	24V	5A	1±	8.66" x 3.6" x 1.61"	2.9 lb
LB55451	200W	Non- Dimmable	24V	8.33A	1±	10.23" x 4.05" x 1.81"	4.0 lb