


PREPARED BY:

PROJECT:

TYPE:



# 3W WALL LIGHT LANDSCAPE SERIES

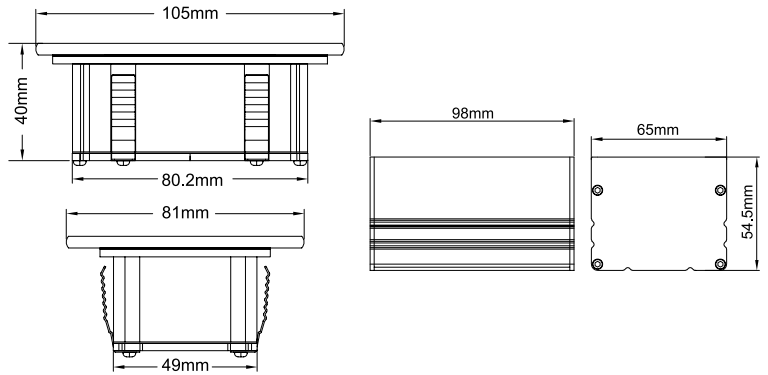

## SPECIFICATIONS


• Wattage	3W	• Beam Angle	Asymmetric downward 45° x 120° (Tilt x Pan)
• Voltage	24V	• Trim	Tempered glass
• Lumens	180lm	• Dimming	Non-Dimmable
• CCT	3000K	• Weight	0.82 lb (0.37kg)
• CRI	80+	• Dimensions	1.57" x 4.13"
• IP Rating	65		

## ORDERING GUIDE


Model	Wattage	CCT	Lumens	Dimensions
LB77106	3W	3000K	180lm	1.57" x 4.13"

**\*NOT COMPATIBLE WITH DIMMABLE DRIVERS**

Light Distribution Curve [Unit: cd]



Lux distance Curve

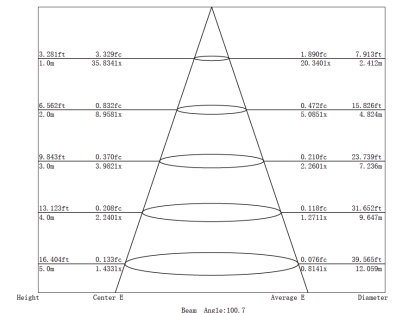


**IP65 IK06**

PREPARED BY:  
PROJECT:  
TYPE:



# POWER SUPPLIES

## LANDSCAPE SERIES

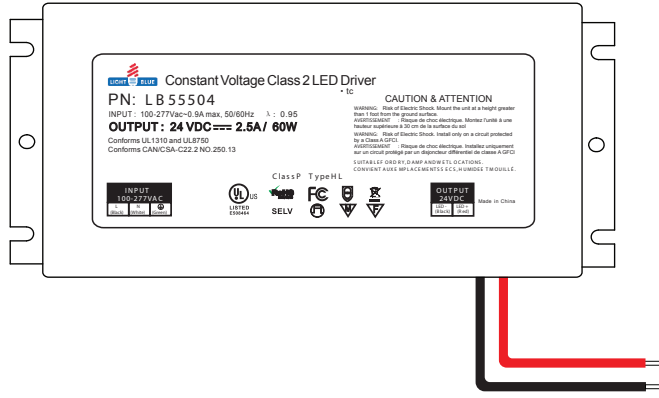

### FEATURES

- Output constant voltage
- Built-in PFC function
- Protections: short circuit/ over voltage/ over heat
- Cooling by free air convection
- Flicker-free
- Class 2, Class P, Type HL, CE, UL, FCC compliant
- PWM output, does not change the color index
- Metal housing
- Suitable for dry location
- Strong compatibility
- Suitable for LED lighting and moving sign applications
- Compliance to worldwide safety regulations for lightings.
- Compatible with Forward phase, Reverse phase, Triac, MLV
- 3 years warranty

### ORDERING GUIDE

Model	Wattage	Dimming	Voltage	Current	Load Regulation	Dimensions	Weight
LB55504	60W	Non- Dimmable	24V	2.5A	1±	7.4" x 3.6" x 1.02"	2.4 lb
LB55450	120W	Non- Dimmable	24V	5A	1±	8.66" x 3.6" x 1.61"	2.9 lb
LB55451	200W	Non- Dimmable	24V	8.33A	1±	10.23" x 4.05" x 1.81"	4.0 lb