

4" TRIMLESS TRIM

RETROFIT SERIES









FEATURES

- For use with new construction housings only.
- Line and low voltage applications.
- Accommodates a PAR-16 or GU-10 LED bulbs via twist and lock access from bottom of the trim.
- Steel metal clips secure to housing.

- Painted finishes are powder coated for abrasion resistance, clear lens included.
- Recommended to use Dura-bond to finish the trimless portion to avoid cracking on the finish.
- Suitable for damp locations

ORDERING GUIDE

Model	Trim	Dimensions	Finish
LB13145	Round	3.86" x 2" (98mm x 55mm)	White
LB13146	Square	5"x 5"x 1.89" (127mm x 127mm x 48mm)	White










COMPATIBLE ITEMS


Model	Description		
LB10561	LED GU10 BULB		
LB15146	4" SHALLOW GU10 RECESSED HOUSING NEW CONSTRUCTION		

DIMENSIONS









TYPF:



4" TRIMLESS TRIM

RETROFIT SERIES

LED GU10 BULB







FEATURES

- Replacement for 75W halogen lamps.
- Suitable for dry and damp locations.
- Dimmable down to 5%.

- Flicker less than 22%.
- Contact us to get the dimmer list.
- Three years limited warranty.

SPECIFICATIONS

Wattage
Input Voltage
Lumens
Power Factor
Efficacy
7W
120V
550lm
>0.9
79


FrequencyDimming


LifetimeDimensions

60Hz <5% 25,000hrs 1.97" x 2.17"

(50mm x 55mm)

4" SHALLOW GU10 RECESSED HOUSING NEW CONSTRUCTION

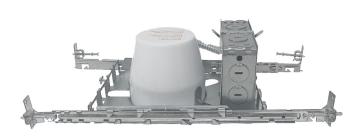



FEATURES

- 3 part quick connectors pre-installed in all J Boxes
- J Box is listed for feed through wiring (4 in 4 out) and seven 0.5" knockouts
- Listed for feed through wiring (4 in 4 out) and seven 0.5" knockouts.
- Pre-installed allowing for position at any point within a 24" joist span.
- Can be turned 900 on plaster frame, and to fit T-bar spine without additional clamps for use in drop ceilings.
- Pre-installed captive nails on bar hangers

SPECIFICATIONS

 • Max Wattage
 50W Max
 • Frame
 Steel

 • Input Voltage
 120V-60Hz
 • Dimensions
 4.25" x 4" x 7.75"

• Product Category Line Voltage Airtight Housing