

PREPARED BY:


PROJECT:

TYPE:



# LED LINEAR PENDANT

## LINEAR SERIES

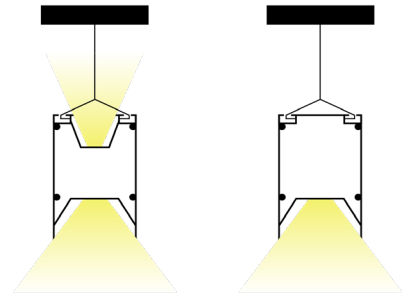

### FEATURES

- 3 CCT Adjustable
- Driver efficiency >87%
- THD <20%
- Applications: Suspended
- Suitable for dry/damp location
- Adjustable suspension cable length and placement
- Milky white lens
- Warranty 3 years

### SPECIFICATIONS

• Input Voltage	120V	• Down Angle Beam	100°
• Lumens	115lm/W	• Lifetime	50,000hrs
• Power Factor	>0.90	• Environment	IP40
• Dimming	0-10V dimmable	• Certification	CE, ETL & UL
• CRI	>80	• Dimensions	W 2" x H 3"


### ORDERING GUIDE

- CCT -




Model	Lighting Direction	Length	Wattage	Lumens	CCT Adj.	Finish
LB85215	Down Angle	4FT	40W	4600lm	(30K/35K/40K)	BK Black
LB85260	Down Angle	8FT	80W	9200lm	(30K/35K/40K)	WT White
LB85220	Up & Down Angle	4FT	50W (Up 20W/Down 30W)	5750lm (Up 2300lm/Down 3450lm)	(30K/40K/50K)	


LB85215

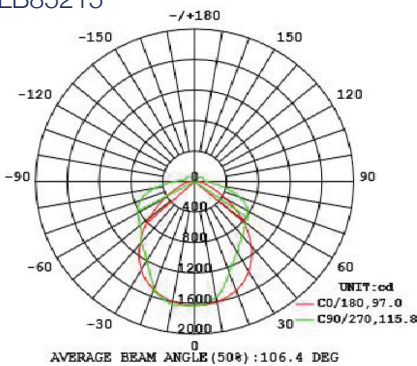

LB85260

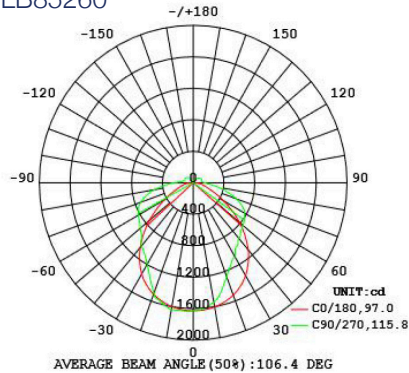

LB85220

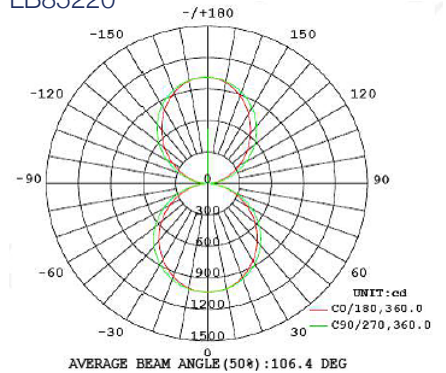

PREPARED BY:

PROJECT:

TYPE:



# LED LINEAR PENDANT

## LINEAR SERIES



\*Track for adjustable suspension cable placement.

Length	Width	Height	Suspension Wire Length	Cord Distance (from edge)
4 FT	2"	3"	Adjustable up to 4FT	4"
8 FT				



### WARNINGS:

1. Installation and maintenance must be completed by electricians or professionals.
2. Please cut off the power before installation and maintenance.
3. The thermally insulating material is not allowed to cover the fixture.
4. Please keep away from the corrosive substance and keep the fixture dry and clean.
5. **DO NOT SHIFT THE SWITCH WHEN THE LIGHT IS ON**

Working temperature: -20°C~50°C

Storage temperature: -20°C~40°C