



PREPARED BY:  
PROJECT:  
TYPE:



# WALL GARDEN PIN LIGHT

## LANDSCAPE SERIES

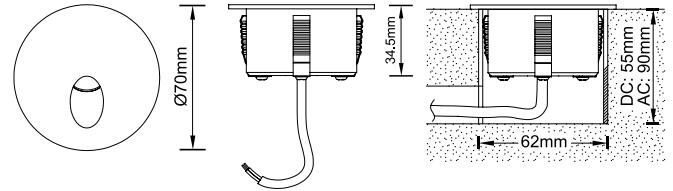

Replaceable LED module

### SPECIFICATIONS


• Wattage	3 Watts	• Dimming	Non-Dimmable
• Voltage	24V	• Insulation Class	Class III
• Lumens	130lm	• Glass	Tempered Glass
• CCT	3000K	• Loading Capacity	320 kgs
• CRI	80+	• Warranty	3 years
• IP Rating	IP65 Waterproof	• Trim	Powder coated painting in black color Aluminum
• Beam Angle	30°	• Weight	0.225 kgs
• Cut Out	2.44 in	• Dimensions	2.76" x 1.36"
• Cable	1 x cable 0.3 M H05RN-F 2x0.5mm square to open wires	• Mounting	Anti-corrosion PVC.

### ORDERING GUIDE LB77107

Model	Wattage	CCT	Lumens	Finish	Dimensions
LB77107	3W	3000K	130lm	Black	2.76" x 1.36"
LB77107-W	3W	3000K	130lm	White	2.76" x 1.36"

**\*NOT COMPATIBLE WITH DIMMABLE DRIVERS**

Light Distribution Curve (3000K, 30°)

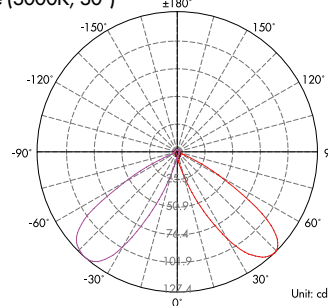

Lux distance Curve (3000K, 30°)

3.281ft	0.476fc	4.998fc	1.933ft
1.0m	5.127lx	53.802lx	0.589m
6.562ft	0.119fc	1.250fc	3.865ft
2.0m	1.282lx	13.451lx	1.178m
9.843ft	0.053fc	0.555fc	5.798ft
3.0m	0.570lx	5.978lx	1.767m
13.123ft	0.030fc	0.312fc	7.731ft
4.0m	0.320lx	3.363lx	2.356m
16.404ft	0.019fc	0.200fc	9.663ft
5.0m	0.205lx	2.152lx	2.945m

Height Center E Beam Angle: 32.8 Average E Diameter



**IP65 IK06**

PREPARED BY:



PROJECT:

TYPE:



# POWER SUPPLIES

## LANDSCAPE SERIES

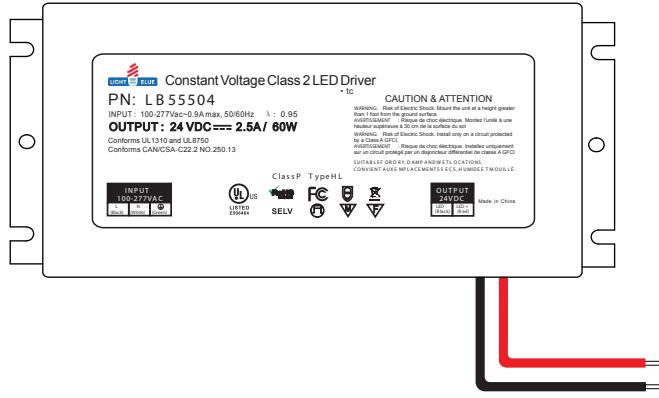

### FEATURES

- Output constant voltage
- Built-in PFC function
- Protections: short circuit/ over voltage/ over heat
- Cooling by free air convection
- Flicker-free
- Class 2, Class P, Type HL, CE, UL, FCC compliant
- PWM output, does not change the color index
- Metal housing
- Suitable for dry location
- Strong compatibility
- Suitable for LED lighting and moving sign applications
- Compliance to worldwide safety regulations for lightings.
- Compatible with Forward phase, Reverse phase, Triac, MLV
- 3 years warranty

### ORDERING GUIDE

Model	Wattage	Dimming	Voltage	Current	Load Regulation	Dimensions	Weight
LB55504	60W	Non- Dimmable	24V	2.5A	1±	7.4" x 3.6" x 1.02"	2.4 lb
LB55450	120W	Non- Dimmable	24V	5A	1±	8.66" x 3.6" x 1.61"	2.9 lb
LB55451	200W	Non- Dimmable	24V	8.33A	1±	10.23" x 4.05" x 1.81"	4.0 lb