




4.5W SERIES  
LED STRIP LIGHT 4.5W/FT

PROJECT:  
PREPARED BY:  
DATE:  
TYPE:

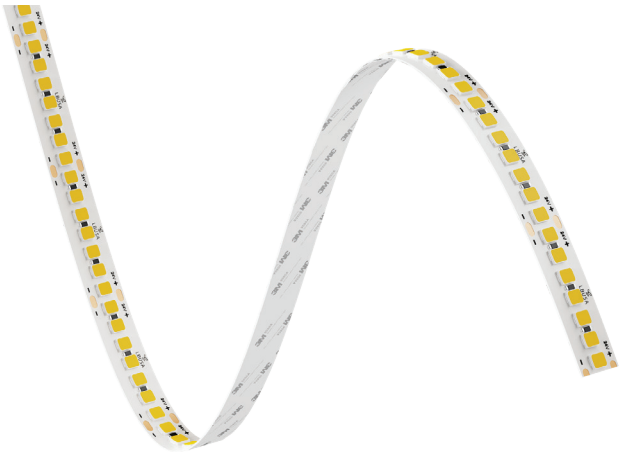

Sub-Primary Lighting

4.5W / FT

2835 Chip

The 4.5 Series LED strip features high-performance 2835 SMD chips that deliver up to 600 lumens per foot with exceptional thermal stability and energy efficiency. With a CRI of 90+ and five CCT options, it provides accurate and vibrant color rendering for precise lighting needs. Available in both IP20 and IP65 ratings, it's suitable for indoor and outdoor use, offering protection against dust and water. This blend of brightness, durability, and flexibility makes the 4.5 Series a reliable solution for a wide range of applications.

Ideal for sub-primary lighting levels, the 4.5 Series delivers powerful yet controlled illumination, making it perfect for cove lighting, ceiling integrations, and layered architectural designs

PERFORMANCE

• Wattage	4.5W/FT	• Maximum Run	16.4FT
• Input Power	24V	• Certification	UL / ETL
• CRI	90	• Dimming	Triac
• LED Chip	2835	• Warranty	5 years

DIMENSIONS

• Length per Roll	16.4FT
• Height x Width	0.02" x 0.39"

INSTALLATION

• Environment	IP20 / IP65	• Adhesive	3M
• Cutting Interval	1.157"	• Ambient Temperature	-20 °C to 40 °





4.5W SERIES


LED STRIP LIGHT 4.5W/FT

PROJECT:

PREPARED BY:

DATE:

TYPE:

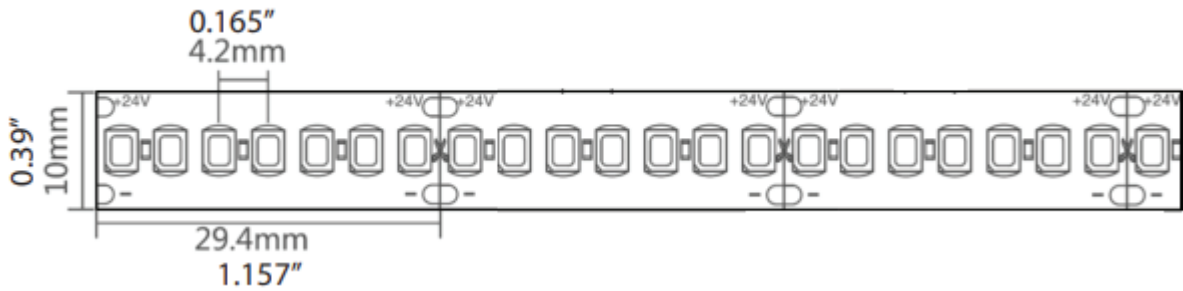


ORDER GUIDE

Model	Length	Wattage	CCT	Lumens/FT	Efficacy	IP Rating
LB53400	16.4FT	4.5W/FT	2700K	585LM	130LM/W	IP20
LB53400-W	16.4FT	4.5W/FT	2700K	589LM	130LM/W	IP65
LB53401	16.4FT	4.5W/FT	3000K	589LM	131LM/W	IP20
LB53401-W	16.4FT	4.5W/FT	3000K	592LM	131LM/W	IP65
LB53402	16.4FT	4.5W/FT	3500K	592LM	132LM/W	IP20
LB53402-W	16.4FT	4.5W/FT	3500K	592LM	132LM/W	IP65
LB53403	16.4FT	4.5W/FT	4000K	607LM	134LM/W	IP20
LB53403-W	16.4FT	4.5W/FT	4000K	607LM	134LM/W	IP65
LB53404	16.4FT	4.5W/FT	5000K	610LM	135LM/W	IP20


**4.5W SERIES**  
LED STRIP LIGHT 4.5W/FT

PROJECT:  
PREPARED BY:  
DATE:  
TYPE:


**TRANSPARENT CLAMP ACCESSORIES**

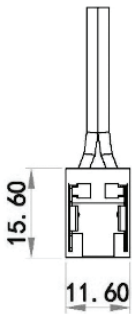


LB55816  
Starter



LB55817  
Coupling

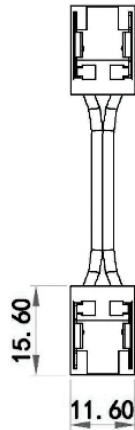


LB55818  
Coupling with Wire

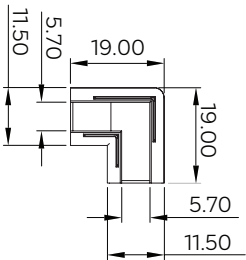


L Coupling


**SCREW FASTEN ACCESSORIES**

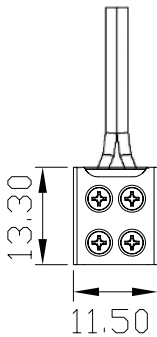


LB55962  
Starter



LB55962  
Coupling



LB55964  
Coupling with Wire



LB55968  
L/T Coupling



4.5W SERIES

LED STRIP LIGHT 4.5W/FT

PROJECT:

PREPARED BY:

DATE:

TYPE:

COMPATIBLE DIRVER



Model LB55500

Wattage 120W

Dimensions 7.4" x 3.7" x 1.7"

Temperature IP67

Dimming Triac/MLV/ELV



Model LB55460

Wattage 30W

Dimensions 12" x 2.4" x 1.4"

Temperature IP67

Dimming Triac/MLV/ELV



Model LB55501

Wattage 200W

Dimensions 9.4" x 4" x 1.7"

Temperature IP20

Dimming Triac/MLV/ELV



Model LB55462

Wattage 60W

Dimensions 12" x 2.4" x 1.4"

Temperature IP67

Dimming Triac/MLV/ELV



Model LB55502

Wattage 300W

Dimensions 10" x 4.3" x 1.7"

Temperature IP20

Dimming Triac/MLV/ELV



Model LB55464

Wattage 96W

Dimensions 12" x 2.4" x 1.4"

Temperature IP67

Dimming Triac/MLV/ELV

## 4.5W SERIES

LED STRIP LIGHT 4.5W/FT


PROJECT:

PREPARED BY:


DATE:

TYPE:

### COMPATIBLE ALUMINUM CHANNEL



ALP 001



IP20 Strip

Strip ✓


Lead ✓

IP65 Strip

Strip ✓

Lead ✗

ALP 013



IP20 Strip

Strip ✓


Lead ✓

IP65 Strip

Strip ✓

Lead ✓

ALP 002



IP20 Strip

Strip ✓


Lead ✓

IP65 Strip

Strip ✓

Lead ✗

ALP 014



IP20 Strip

Strip ✓


Lead ✓

IP65 Strip

Strip ✓

Lead ✓

ALP 003



IP20 Strip

Strip ✓


Lead ✓

IP65 Strip

Strip ✓

Lead

ALP 103



IP20 Strip

Strip ✓


Lead ✓

IP65 Strip

Strip ✓

Lead ✗

ALP 004



IP20 Strip

Strip ✓


Lead ✓

IP65 Strip

Strip ✓

Lead ✓

ALP 113



IP20 Strip

Strip ✓


Lead ✓

IP65 Strip

Strip ✓

Lead ✓

ALP 006



IP20 Strip

Strip ✓


Lead ✓

IP65 Strip

Strip ✓

Lead ✓

ALP 114



IP20 Strip

Strip ✓


Lead ✓

IP65 Strip

Strip ✓

Lead ✗

ALP 007



IP20 Strip

Strip ✓


Lead ✓

IP65 Strip

Strip ✓

Lead ✗

ALP 158



IP20 Strip

Strip ✓


Lead ✓

IP65 Strip

Strip ✓

Lead ✓

ALP 008



IP20 Strip

Strip ✓


Lead ✓

IP65 Strip

Strip ✓

Lead ✗

ALP 159



IP20 Strip

Strip ✓

Lead ✓

IP65 Strip

Strip ✓

Lead ✓

## 4.5W SERIES

LED STRIP LIGHT 4.5W/FT

PROJECT:

PREPARED BY:

DATE:

TYPE:



### Cautions

## SAFETY PRECAUTIONS

Use as directed

This product serves exclusively lighting purposes and may:

- > Only be operated using a suitable driver
- > Only be used in dry condition:
  - not in damp or dirt-endangered rooms.
  - not in areas of high air humidity.
- > Not be exposed to strong mechanical loads or to strong contamination.
- > Only be installed and operated after a condition inspection if the product is dirty or has been moistened through storage
- > Not be modified or converted.

If these points named above are not adhered to, a short circuit or electrical shock may occur!

Installation

The complete installation must be done by an electrical expert or a specialized maintenance team, who is familiar valid directives.

IP20



Do not press the surface of LED



Pay attention to damp-proof and dustproof



**Attention: Switch off power of the mains supply or respectively of the connection lead before doing any works.**

Use only parts, which are supplied with the product or are described as accessories! Otherwise, the product or the installation might not be sufficiently safe!

Indication for the installer: In case you do not install a completely supply system (with transformer), you are considered a "manufacturer" by the low-voltage directive. In this case you are required to ensure the conformity of the whole system and declare it by attaching the CE-sign.

Installation place

Make sure that the product is mounted on a stable, even and tilt-fixed background. Note the minimum distances in the ceiling.



**Attention: Do not cover the product, especially not with insulating materials.**

Operation- Information for the user

Operate the product only if it is working correctly. Switch off the product with malfunction immediately and operate it again only after examination by an electrical specialist. This is the case, when:

- > Visible damages appear.
- > The product does not work.
- > Smoke, steam or crackling sounds appear.
- > An overheating is recognizable

Repairs of the product or work on mains voltage-prominent sections may only be carried out by qualified electricians.



**Attention: Here exists mortal danger from an electric shock!**

How to avoid failure or fire risk

- > Do not cover the product- provide free air circulation!
  - > Do not hang or fasten anything on the product, especially no decoration.
  - > Never let children play unsupervised with electric products!
- Children can not always estimate dangers in dealing with electric energy correctly.

Disconnect the product from power, before you...

- > Clean or maintain the product.
- > Do any works on the product or its components (electric expert).



**Attention: Do not place in the environment which includes strong acid and strong base.**

LED get vulcanized, LED strip should be installed in the environment where does not has oil and corrosive substances. Such as these substances which contain Sulphur, Bromine, Iodine and Chlorine. Some other chemical element which will cause aromatic hydrocarbons releasing (such as methylbenzene, xylene, methyl acetoacetate ethyl acetate, etc.)