TYPE:



96 WATT

CONSTANT VOLTAGE TRIAC DIMMING DRIVER



FEATURES

- Constant Voltage Mode
- Universal AC input/Full range: AC120-277V
- Flick free-dimming
- ETL Certification, Class II power unit

- Protections: Short circuit/ Overload/ Over Voltage
- Fully isolated aluminum case with IP67 level (outdoor use)
- Suitable for wet location, IP67
- Suitable for LED Strip, LED modules or LED sign application

SPECIFICATIONS

| • Wattage | 96W | Output Voltage | 24VDC |
|----------------------------------|------|---|--------------------------|
| Power Factor | 0.93 | Rated Current | 4A |
| • Efficiency | 85% | Working Temperature | -25°C to 45°C |
| • THD | 25% | Working Humidity | 20~90%RH, non-condensing |
| Environment | IP67 | | |
| | | | |





ORDERING GUIDE


| Model | Dimming | Voltage | Current | Wattage |
|---------|---------|---------|---------|---------|
| LB55464 | Triac | 24V | 4A | 96W |
| | MLV | | | |
| | ELV | | | |



96 WATT

CONSTANT VOLTAGE TRIAC DIMMING DRIVER

DIMENSIONS

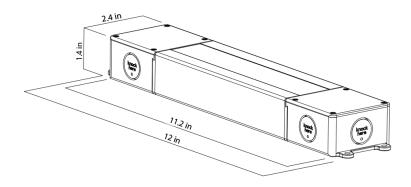

Dimming Operation

*Dimmable with standard TRIAC, MLV and ELV dimmers

CONNECTING DIAGRAM



INSTRUCTIONS:

- 1. This driver should be installed by a qualified professional.
- 2. Please make sure the transformer is installed with adequate ventilation around it to allow for heat dissipation.
- 3. Ensure that wiring is correct before testing in order to avoid light and power supply damage.



96 WATT

CONSTANT VOLTAGE TRIAC DIMMING DRIVER

DIMMER COMPATIBLE CHART

| Brand | Senies | Model | Load | Dimmability |
|---------|------------------|------------|-------|-------------|
| Lutron | Ariadni | AYCL-153P | 150W | 10%-100% |
| | Diva | DV-600PR | 600W | 1%-100% |
| | Diva | DVCL-153P | 150W | 10%-100% |
| | Maestro | MACL-153MH | 600W | 10%-100% |
| | Maestro Wireless | MRF2-6CL | 150W | 10%-100% |
| | Rotary | D-600P | 600W | 10%-100% |
| | Electronic (ELV) | NTELV-300P | 600W | 10%-100% |
| | Skylark | S-600P | 600W | 10%-100% |
| | Skylark Conytour | CT-600P | 600W | 1%-100% |
| | Skylark Conytour | CTCL-153P | 150W | 10%-100% |
| | Toggler | TG-600P | 600W | 10%-100% |
| | Toggler | TCCL-153P | 150W | 10%-100% |
| Leviton | Sureslide | 6633 | 600W | 10%-100% |
| | Sureslide Decora | 6674 | 600W | 20%-100% |
| | Trimatron | 6602 | 600W | 20%-100% |
| | ILLVMATECH | IPL06 | 600W | 1%-100% |
| Legrand | Adorne | ADTP703TU | 700W | 20%-100% |
| | Harmony | H703PTW | 700W | 10%-100% |
| Cooper | Aspire | 9540 | 1000W | 10%-100% |
| | Devine | DAL06P | 300W | 10%-100% |

Light Blue USA has provided this dimmer switch compatibility chart for guidance when selecting a dimmer and lamp combination. Our lamps were tested for compatibility with the above listed dimmer. Dimmers that do not appear on the chart might still be compatible but have not tested.