

PREPARED BY:

PROJECT:


TYPE:



LBUSA

LB75460

LED CANOPY LIGHT

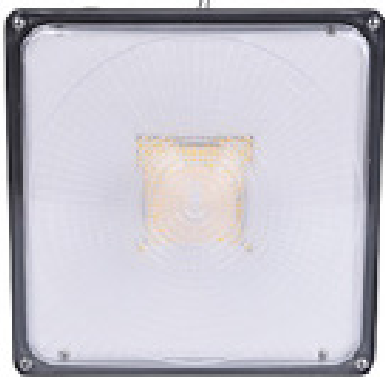

FEATURES

- 3 Wattage Selectable
- 3 CCT Selectable
- Universal Voltage
- Slim design for minimal obstruction
- Powder Coated Finish
- 3 Year Warranty

ELECTRICAL SYSTEM

- Input Voltage: 120-277V , 50/60Hz
- Power Factor : > 0.9 at full load
- Total Harmonic Distortion: < 20% at full load
- Integral 10kV surge suppression protection standar (options)
- Luminaire is qualified to operate at ambient temperatures of -40 °C to +50 °C

FINISH

Exterior parts are protected by Super Durable thermoset powder coat finish that provides superior resistance to corrosion and weathering. A tightly controlled multi-stage process ensures a minimum 3 mils thickness for a finish that can withstand extreme climate changes without cracking or peeling. Available in textured and non-textured finishes.

ORDERING GUIDE

Model	Input	Wattage	Lumens	CCT	Finish
LB75460	120-277VAC	70W	7000lm	3000K	BZ Bronze
		45W	5550lm	4000K	
		20W	2500lm	5000K	

PREPARED BY:
PROJECT:
TYPE:



LBUSA

LB75460
LED CANOPY LIGHT

DIMENSIONS

