


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:120.72V I:0.3208A P:34.816W PF:0.8991 Freq:59.98Hz Lamp Flux:1937.53x1 lm		
NAME: LB76354	TYPE:	WEIGHT:
SPEC.: 5000K	DIM.:	SERIAL No.:
MFR.: LB	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 55.65 lm/W
MODEL	LB76354	I _{max} (cd/klm)	342.6	S/MH (C0/180)	1.27	
NOMINAL POWER (W)	35	LOR (%)	100.0	S/MH (C90/270)	1.27	
RATED VOLTAGE (V)	120.0	TOTAL FLUX (lm/klm)	1000.0	η UP, DN (C0-180)	0.0, 49.9	
NOMINAL FLUX (lm)	1937.53	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 50.1	
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	1.25	
TEST VOLTAGE (V)	120	η down (%)	100.0	CIBSE SHR MAX	1.35	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

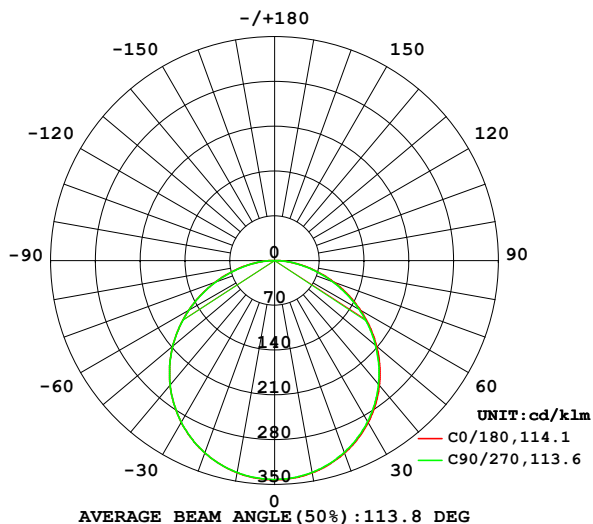

C0 PLANE ISOLUX DIAGRAM (UNIT: lx/klm)

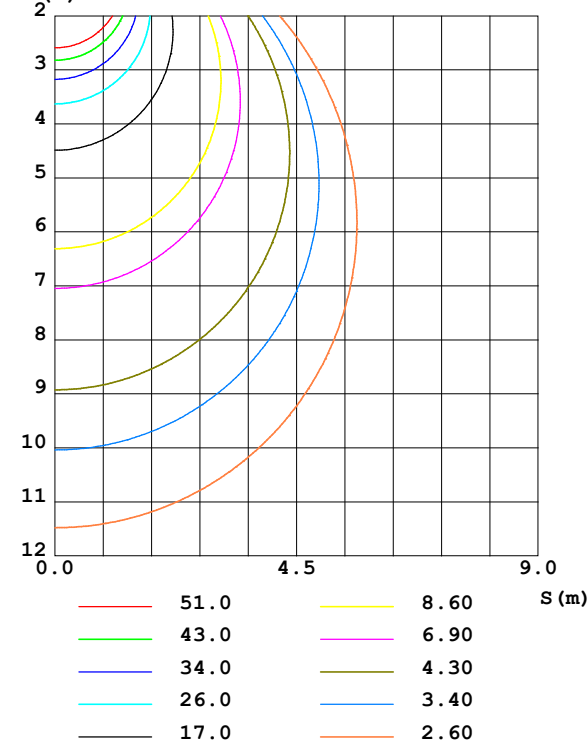

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3 °C
Operators:
Test Date: 2024-03-15

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.479
Humidity: 65.0%
Test Distance: 10.000m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	337.1	336.6	336.2	335.8	336.8	336.7	336.6	336.4	0- 10	32.39	32.39	3.24,3.24
20	320.0	319.5	318.9	318.5	319.8	320.0	319.6	319.5	10- 20	92.96	125.3	12.5,12.5
30	292.5	291.9	290.8	290.2	292.1	292.5	292.0	291.9	20- 30	141.4	266.8	26.7,26.7
40	254.9	254.2	252.8	252.2	254.2	254.9	254.2	254.2	30- 40	171.4	438.1	43.8,43.8
50	208.2	207.6	205.9	205.3	208.1	209.0	207.9	208.0	40- 50	178.6	616.8	61.7,61.7
60	155.2	154.6	152.5	152.0	154.9	156.0	154.6	154.5	50- 60	162.2	778.9	77.9,77.9
70	98.78	98.39	96.06	95.56	98.66	99.71	97.82	97.62	60- 70	124.8	903.7	90.4,90.4
80	44.28	44.08	42.31	41.95	44.42	45.14	43.13	42.84	70- 80	73.98	977.7	97.8,97.8
90	0.8385	0.8457	0.8457	0.8457	0.6522	0.6629	0.6343	0.6199	80- 90	22.29	1000	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd/klm									UNIT:lm/klm		

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:
Test Date:2024-03-15

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.479
Humidity:65.0%
Test Distance:10.000m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.72V I:0.3208A P:34.816W PF:0.8991 Freq:59.98Hz Lamp Flux:1937.53x1 lm		
NAME: LB76354	TYPE:	WEIGHT:
SPEC.: 5000K	DIM.:	SERIAL No.:
MFR.: LB	SUR.:	Shielding Angle:

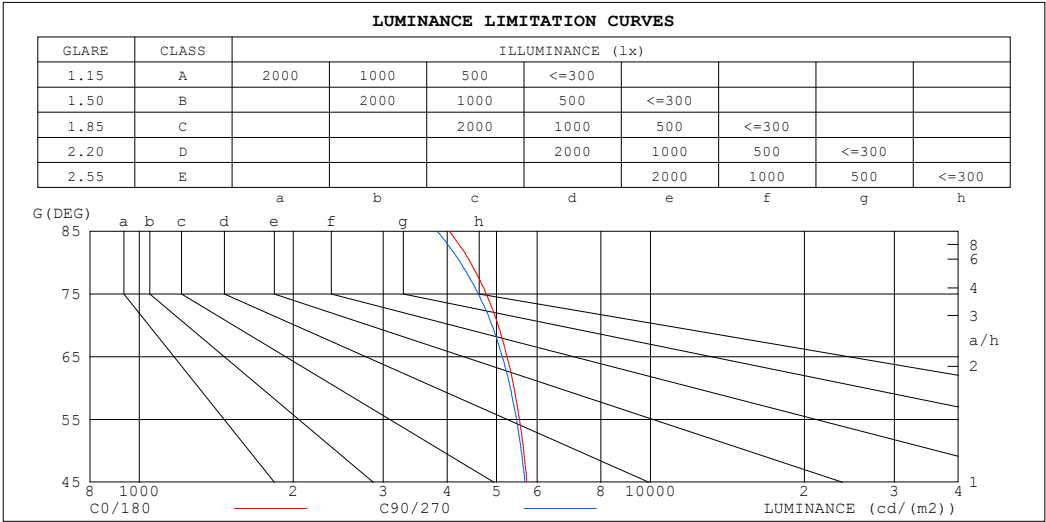

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	4035	3821
80	4446	4249
75	4766	4601
70	5036	4898
65	5240	5127
60	5412	5320
55	5543	5471
50	5648	5587
45	5733	5680


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:
Test Date:2024-03-15

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.479
Humidity:65.0%
Test Distance:10.000m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.72V I:0.3208A P:34.816W PF:0.8991 Freq:59.98Hz Lamp Flux:1937.53x1 lm		
NAME: LB76354	TYPE:	WEIGHT:
SPEC.: 5000K	DIM.:	SERIAL No.:
MFR.: LB	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0														
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0														
pfc	20%			20%			20%			20%			20%			0														
RCR	RCR:Room Cavity Ratio															Coefficients of Utilization(CU)														
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00														
1.0	1.04	.99	.95	1.01	.97	.94	.97	.94	.91	.93	.90	.88	.89	.87	.85	.83														
2.0	.90	.83	.77	.88	.82	.76	.85	.79	.74	.81	.77	.73	.78	.74	.71	.69														
3.0	.79	.71	.64	.77	.70	.63	.74	.68	.62	.72	.66	.61	.69	.64	.60	.58														
4.0	.70	.61	.54	.68	.60	.54	.66	.59	.53	.64	.57	.52	.61	.56	.51	.49														
5.0	.62	.53	.46	.61	.53	.46	.59	.51	.46	.57	.50	.45	.55	.49	.45	.42														
6.0	.56	.47	.40	.55	.46	.40	.53	.46	.40	.52	.45	.40	.50	.44	.39	.37														
7.0	.51	.42	.36	.50	.41	.36	.48	.41	.35	.47	.40	.35	.46	.39	.35	.33														
8.0	.46	.38	.32	.46	.37	.32	.44	.37	.31	.43	.36	.31	.42	.36	.31	.29														
9.0	.42	.34	.29	.42	.34	.28	.41	.33	.28	.40	.33	.28	.39	.32	.28	.26														
10.0	.39	.31	.26	.39	.31	.26	.38	.31	.26	.37	.30	.26	.36	.30	.25	.24														

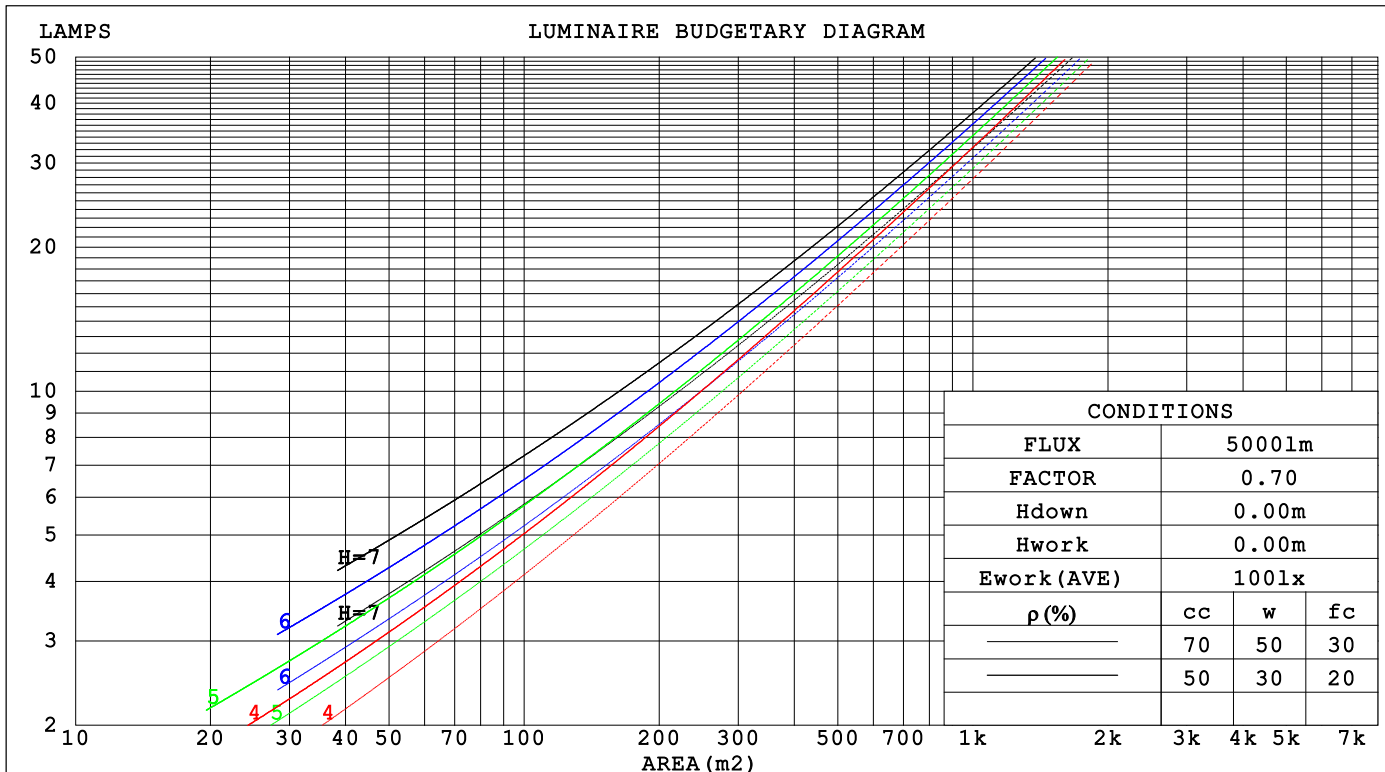

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:
Test Date:2024-03-15

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.479
Humidity:65.0%
Test Distance:10.000m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:120.72V I:0.3208A P:34.816W PF:0.8991 Freq:59.98Hz Lamp Flux:1937.53x1 lm		
NAME: LB76354	TYPE:	WEIGHT:
SPEC.: 5000K	DIM.:	SERIAL No.:
MFR.: LB	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.316	.180	.057	.309	.176	.056	.296	.170	.054	.283	.163	.052	.272	.158	.051		
2.0	.296	.162	.050	.290	.160	.049	.278	.155	.048	.267	.150	.047	.257	.145	.046		
3.0	.273	.145	.044	.268	.143	.043	.257	.139	.042	.248	.136	.042	.239	.132	.041		
4.0	.252	.131	.038	.247	.129	.038	.237	.126	.038	.229	.123	.037	.221	.120	.037		
5.0	.232	.118	.034	.228	.117	.034	.220	.114	.034	.212	.112	.033	.205	.110	.033		
6.0	.215	.108	.031	.211	.107	.031	.204	.105	.030	.197	.102	.030	.191	.100	.030		
7.0	.200	.099	.028	.197	.098	.028	.190	.096	.028	.184	.094	.027	.178	.093	.027		
8.0	.187	.091	.026	.184	.090	.026	.178	.089	.025	.172	.087	.025	.167	.086	.025		
9.0	.175	.085	.024	.172	.084	.024	.167	.083	.023	.162	.081	.023	.157	.080	.023		
10.0	.164	.079	.022	.162	.078	.022	.157	.077	.022	.153	.076	.022	.149	.075	.021		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)										
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020		
1.0	.181	.156	.134	.155	.134	.115	.106	.092	.080	.061	.053	.046	.020	.017	.015		
2.0	.173	.132	.098	.148	.114	.084	.101	.079	.059	.058	.046	.034	.019	.015	.011		
3.0	.165	.114	.074	.142	.099	.064	.097	.069	.045	.056	.040	.026	.018	.013	.009		
4.0	.157	.101	.058	.135	.087	.050	.093	.061	.035	.054	.036	.021	.017	.012	.007		
5.0	.150	.091	.047	.129	.078	.041	.089	.055	.029	.051	.032	.017	.017	.010	.006		
6.0	.143	.082	.039	.123	.071	.034	.085	.050	.024	.049	.029	.014	.016	.010	.005		
7.0	.136	.075	.033	.117	.065	.029	.081	.046	.020	.047	.027	.012	.015	.009	.004		
8.0	.129	.070	.029	.111	.060	.025	.077	.042	.018	.045	.025	.011	.015	.008	.003		
9.0	.123	.065	.025	.106	.056	.022	.074	.039	.016	.043	.023	.009	.014	.008	.003		
10.0	.118	.060	.022	.101	.052	.019	.070	.037	.014	.041	.022	.008	.013	.007	.003		

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:
Test Date:2024-03-15

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.479
Humidity:65.0%
Test Distance:10.000m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.72V I:0.3208A P:34.816W PF:0.8991 Freq:59.98Hz Lamp Flux:1937.53x1 lm										
NAME: LB76354					TYPE:			WEIGHT:		
SPEC.: 5000K					DIM.:			SERIAL No.:		
MFR.: LB					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	16.6	18.1	16.8	18.3	18.5	16.5	18.0	16.8	18.2	18.4
3H	18.1	19.6	18.4	19.8	20.0	18.0	19.5	18.3	19.7	19.9
4H	18.8	20.1	19.1	20.4	20.6	18.7	20.0	19.0	20.3	20.5
6H	19.3	20.6	19.6	20.8	21.1	19.1	20.4	19.5	20.7	21.0
8H	19.4	20.7	19.8	21.0	21.3	19.3	20.5	19.6	20.8	21.1
12H	19.6	20.7	19.9	21.0	21.3	19.4	20.6	19.7	20.9	21.2
4H 2H	17.2	18.5	17.5	18.8	19.0	17.1	18.5	17.4	18.7	19.0
3H	18.9	20.1	19.3	20.4	20.7	18.9	20.1	19.2	20.3	20.7
4H	19.7	20.8	20.1	21.1	21.5	19.6	20.7	20.0	21.0	21.4
6H	20.4	21.3	20.8	21.7	22.0	20.2	21.2	20.6	21.5	21.9
8H	20.6	21.5	21.0	21.9	22.2	20.4	21.3	20.9	21.7	22.1
12H	20.7	21.6	21.2	22.0	22.4	20.6	21.4	21.0	21.8	22.2
8H 4H	20.0	20.9	20.4	21.3	21.7	19.9	20.8	20.3	21.2	21.6
6H	20.8	21.6	21.3	22.0	22.4	20.7	21.4	21.1	21.8	22.3
8H	21.1	21.8	21.6	22.2	22.7	21.0	21.7	21.5	22.1	22.5
12H	21.4	22.0	21.9	22.4	22.9	21.2	21.8	21.7	22.3	22.7
12H 4H	20.0	20.9	20.5	21.2	21.7	19.9	20.8	20.4	21.2	21.6
6H	20.9	21.5	21.3	22.0	22.4	20.8	21.4	21.2	21.9	22.3
8H	21.2	21.8	21.7	22.3	22.7	21.1	21.7	21.6	22.1	22.6
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.1 / - 0.2					+ 0.1 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.1 / - 0.3					+ 0.1 / - 0.3				

CIE Pub.117, 1938 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 2.3)
Area: 0.111111 m2

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:
Test Date:2024-03-15

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.479
Humidity:65.0%
Test Distance:10.000m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.72V I:0.3208A P:34.816W PF:0.8991 Freq:59.98Hz Lamp Flux:1937.53x1 lm		
NAME: LB76354	TYPE:	WEIGHT:
SPEC.: 5000K	DIM.:	SERIAL No.:
MFR.: LB	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	57	45	38	56	45	38	55	45	38	32
0.80	67	55	48	66	55	48	64	54	47	40
1.00	76	64	57	74	64	57	72	65	56	49
1.25	83	72	65	81	71	64	78	70	64	56
1.50	88	78	70	86	77	70	83	75	69	61
2.00	95	86	79	93	85	79	89	82	77	69
2.50	98	91	84	96	89	84	93	87	82	73
3.00	102	95	89	100	93	88	96	90	86	77
4.00	106	100	95	104	98	94	99	95	91	82
5.00	108	103	99	106	102	98	101	98	95	85
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators:
Test Date: 2024-03-15

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.479
Humidity: 65.0%
Test Distance: 10.000m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:120.72V I:0.3208A P:34.816W PF:0.8991 Freq:59.98Hz Lamp Flux:1937.53x1 lm		
NAME: LB76354	TYPE:	WEIGHT:
SPEC.: 5000K	DIM.:	SERIAL No.:
MFR.: LB	SUR.:	Shielding Angle:

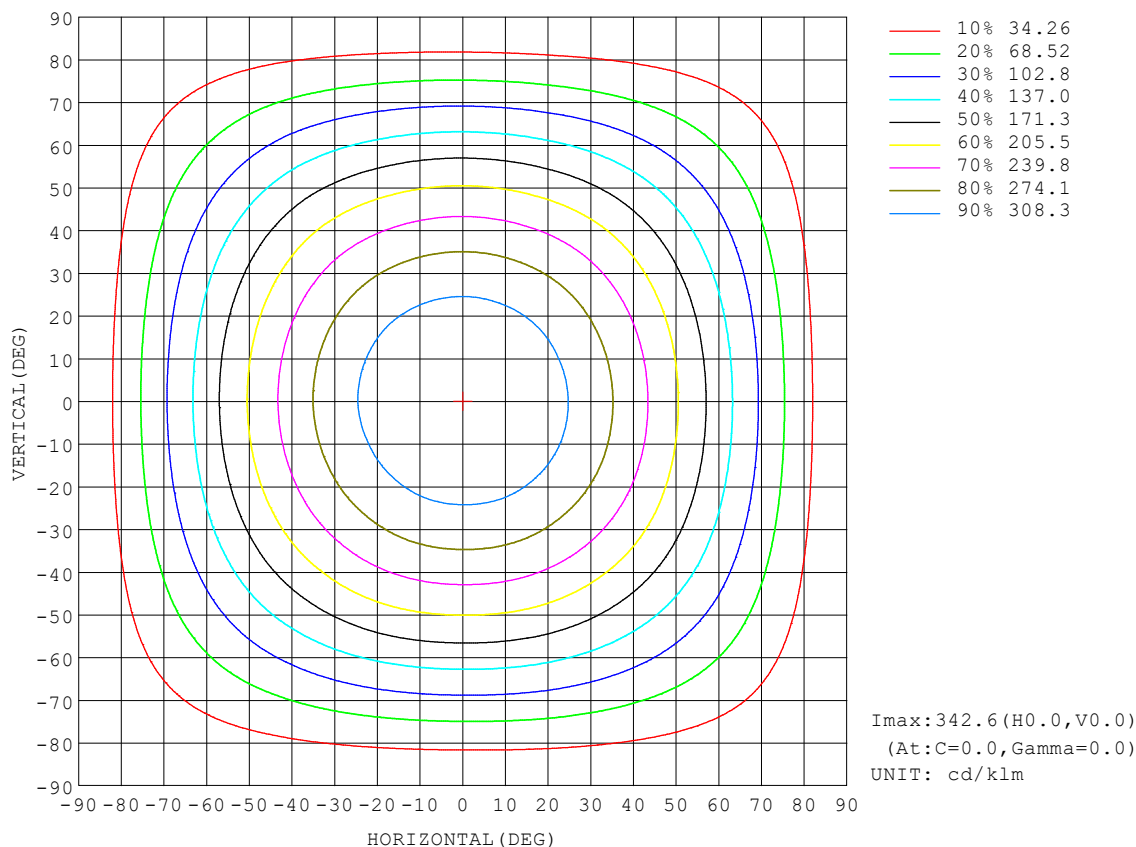


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators:
Test Date: 2024-03-15

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.479
Humidity: 65.0%
Test Distance: 10.000m [K=1.0000]
Remarks:

AAI Figure

Test:U:120.72V I:0.3208A P:34.816W PF:0.8991 Freq:59.98Hz Lamp Flux:1937.53x1 lm		
NAME: LB76354	TYPE:	WEIGHT:
SPEC.: 5000K	DIM.:	SERIAL No.:
MFR.: LB	SUR.:	Shielding Angle:

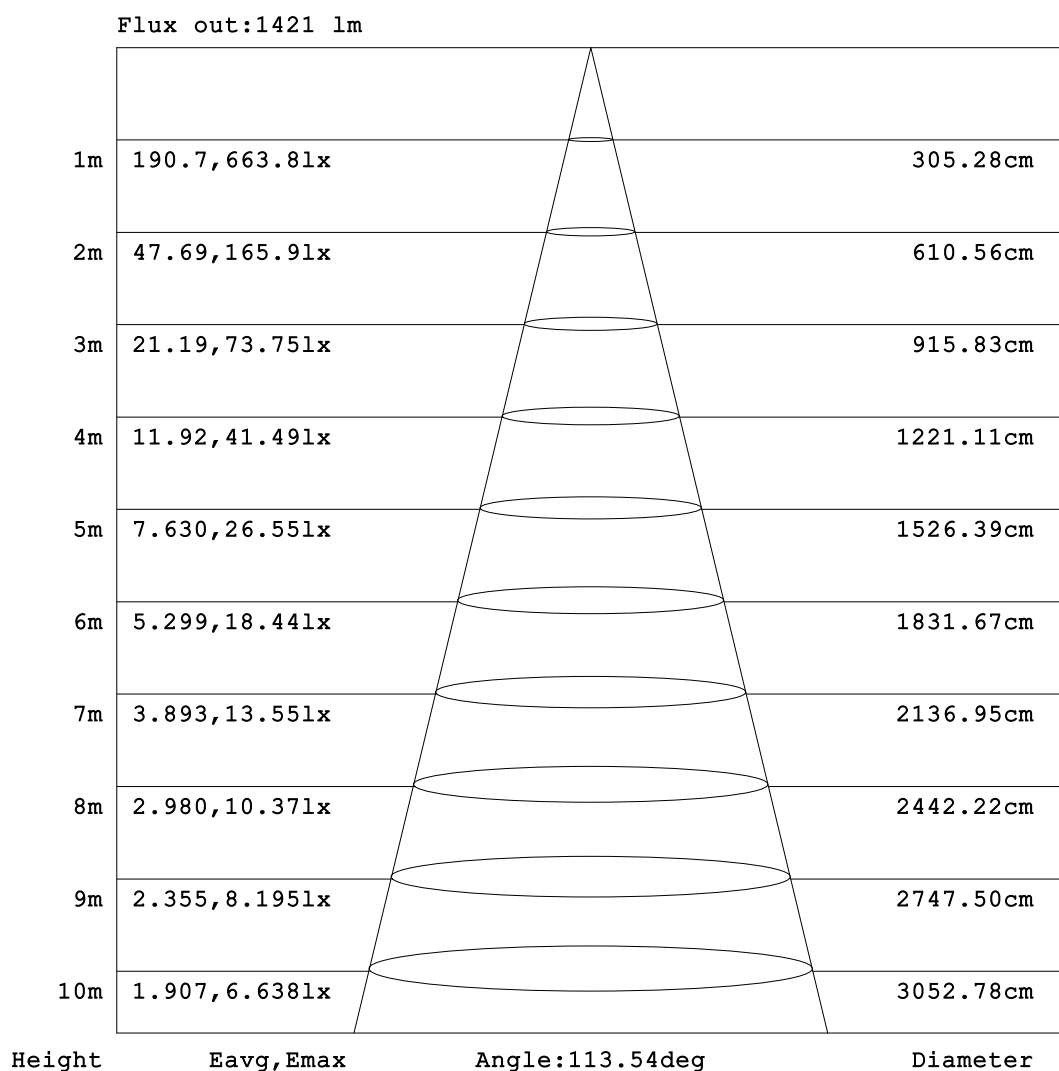


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:
Test Date:2024-03-15

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.479
Humidity:65.0%
Test Distance:10.000m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:120.72V I:0.3208A P:34.816W PF:0.8991 Freq:59.98Hz Lamp Flux:1937.53x1 lm		
NAME: LB76354	TYPE:	WEIGHT:
SPEC.: 5000K	DIM.:	SERIAL No.:
MFR.: LB	SUR.:	Shielding Angle:

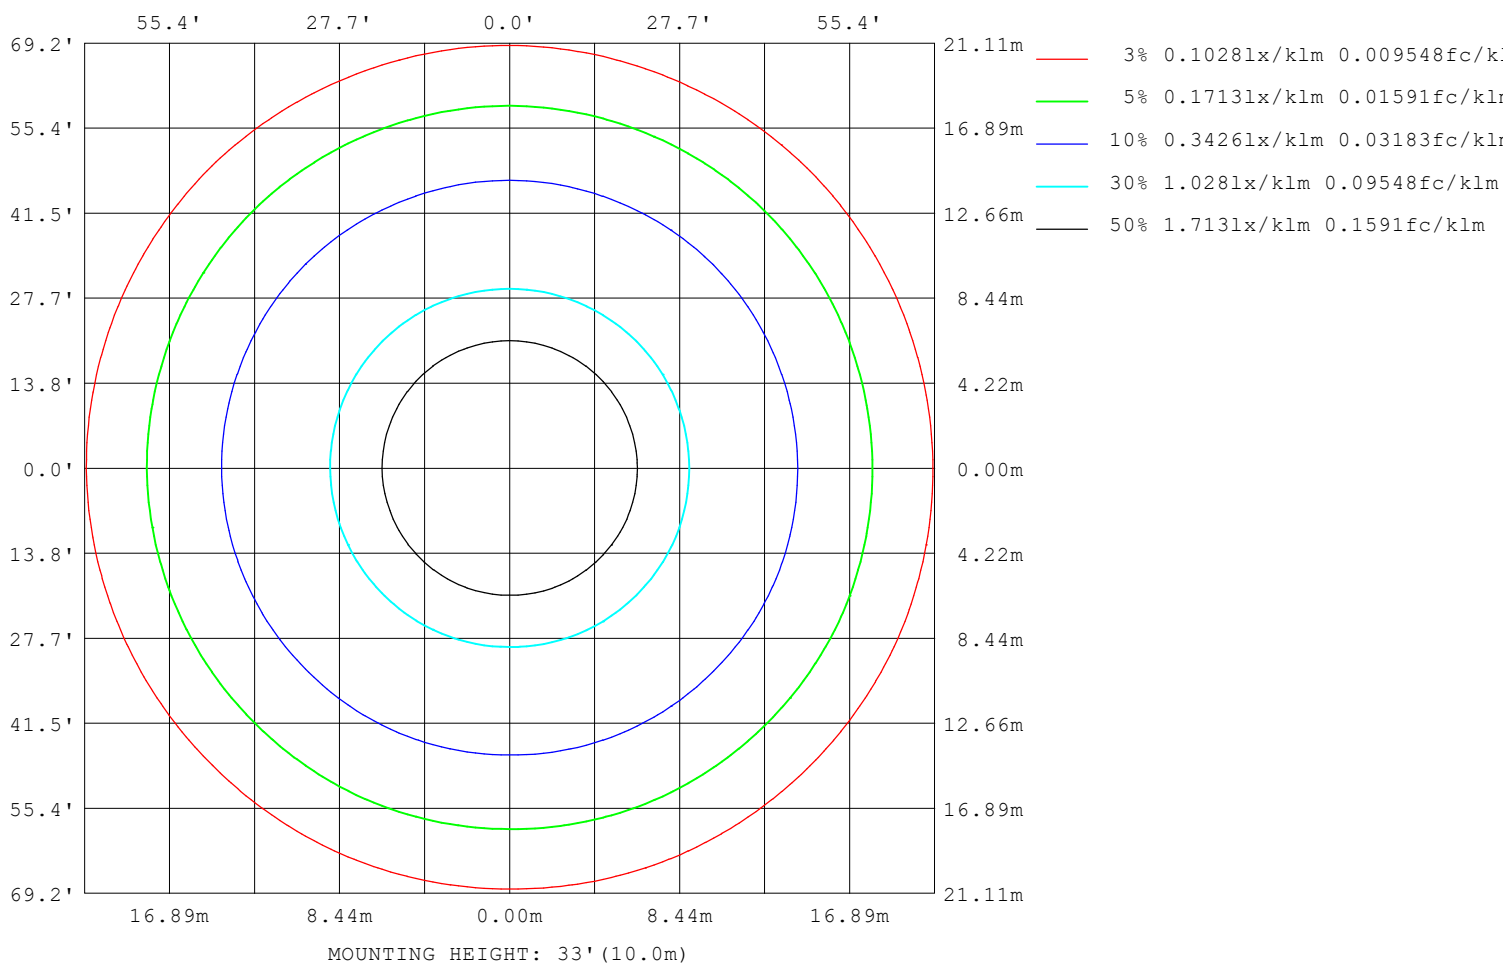

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators:
Test Date: 2024-03-15

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.479
Humidity: 65.0%
Test Distance: 10.000m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:120.72V I:0.3208A P:34.816W PF:0.8991 Freq:59.98Hz Lamp Flux:1937.53x1 lm		
NAME: LB76354	TYPE:	WEIGHT:
SPEC.: 5000K	DIM.:	SERIAL No.:
MFR.: LB	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	5239
L_0~180 (75) av	4769
L_0~180 (85) av	4059
L_90~270 (65) av	5170
L_90~270 (75) av	4648
L_90~270 (85) av	3856
L_45 (65) av	5204
L_45 (75) av	4708
L_45 (85) av	3954

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:
Test Date:2024-03-15

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.479
Humidity:65.0%
Test Distance:10.000m [K=1.0000]
Remarks:

Planar Illuminance Curve

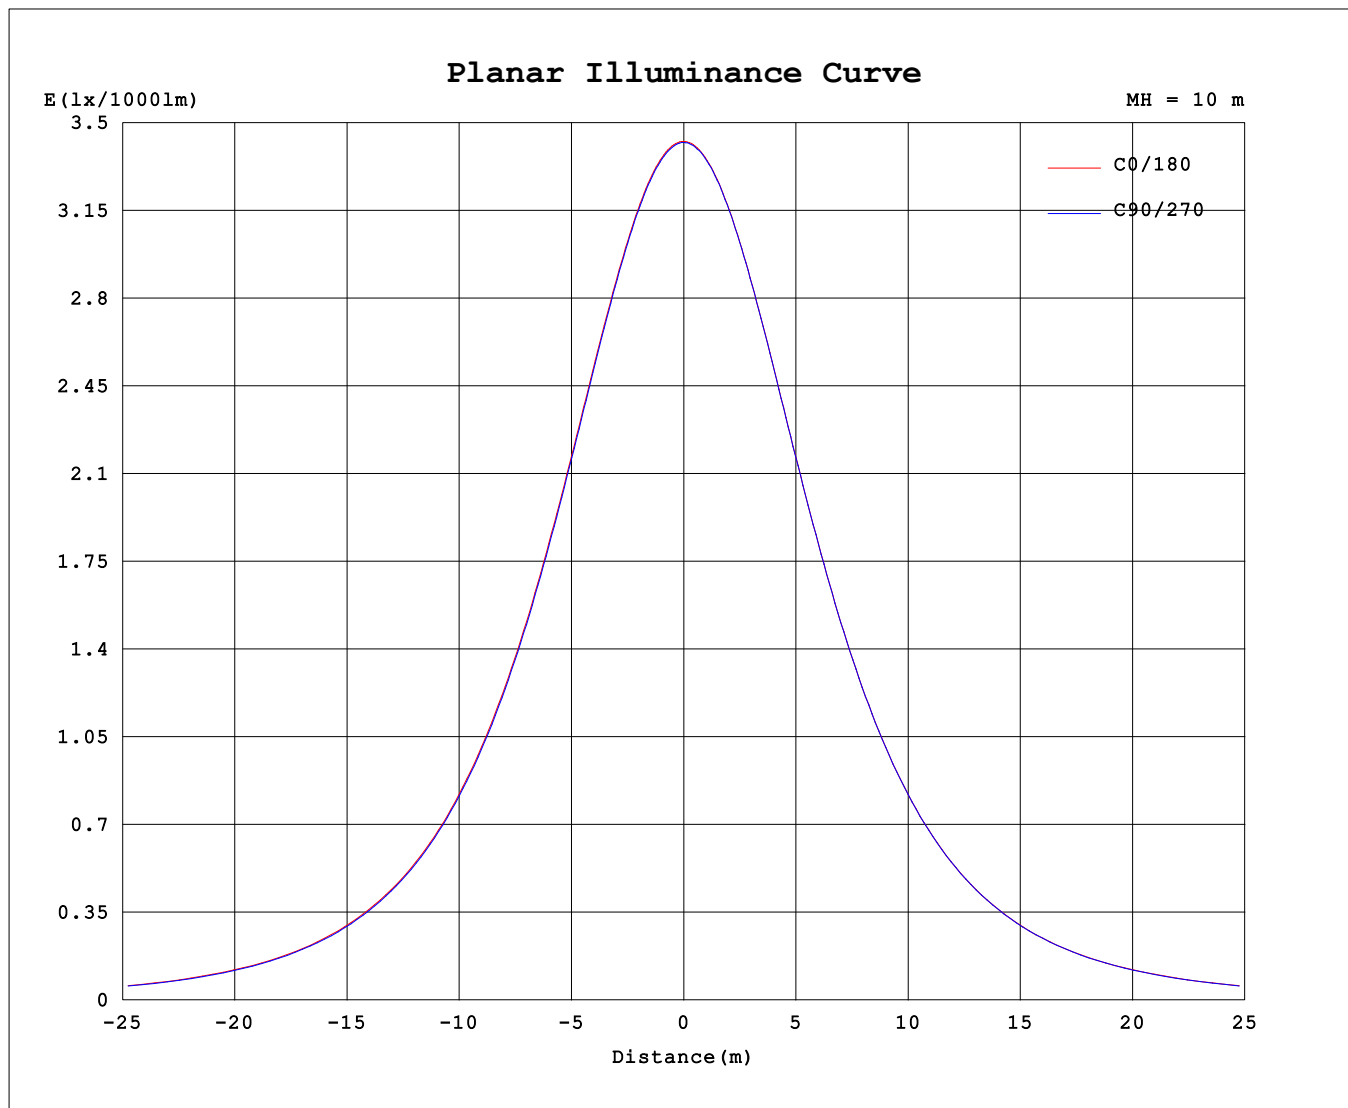

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3 °C
Operators:
Test Date: 2024-03-15

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.479
Humidity: 65.0%
Test Distance: 10.000m [K=1.0000]
Remarks:

Test:U:120.72V I:0.3208A P:34.816W PF:0.8991 Freq:59.98Hz Lamp Flux:1937.53x1 lm		
NAME: LB76354	TYPE:	WEIGHT:
SPEC.: 5000K	DIM.:	SERIAL No.:
MFR.: LB	SUR.:	Shielding Angle:

UNIT: cd/klm

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators:
Test Date: 2024-03-15

```

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.479
Humidity:65.0%
Test Distance:10.000m [K=1.0000]
Remarks:

```