

PREPARED BY:



PROJECT:

TYPE:



4" Recessed Slim Downlight

Fire Rated

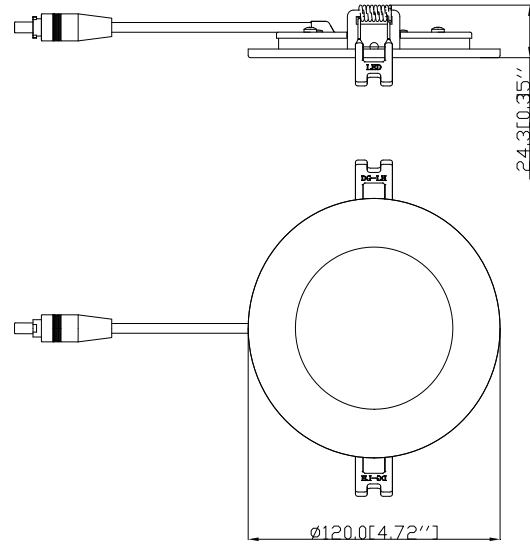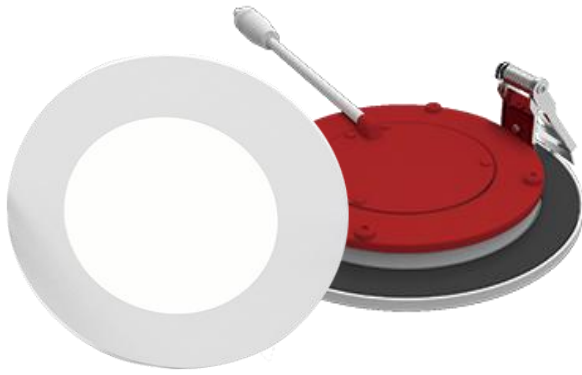

FEATURES

- 2 Hour Fire Rated Without additional housing or hardware
- Heat Resistant Casing Provides up to 2 hours fire protection
- Heavy Duty Steel Spring Clips for easy installation
- Plenum Rated Cable For commercial installations
- Connection Box Comes with Junction Box & Driver, No Housing Required.
- Class 2, Class P, Type HL, CE, UL, FCC compliant
- CRI 90+
- 2700K, 3000K, 3500K, 4000K, 5000K Selectable

SPECIFICATIONS

| | | | |
|----------------------|--|-----------------------|--|
| • Applications | Multi-Family Residential, Basements & Commercial | • Cable | FT6 / CMP Plenum Rated |
| • Energy Used | 9W | • Air Tight | Yes |
| • Color Temperature | 2700K,3000K,3500K,4000K,5000K Selectable | • Finish | White,Black,Satin Nickel |
| • Light Output | 900LM | • Ambient Temperature | -4°F (-20°C) to +104°F (+40°C) |
| • Halogen Equivalent | 56W | • Projected Life | 70% Light Output at 50,000 Hours |
| • Beam Angle | 120° | • Certification | cETLus, ENERGY STAR |
| • CRI | 90+ | • Fire Rating | UL 263-2011 (R2022), STM E119-20 & CAN/ULC-S101-14 |
| • Driver Input | 120V AC 50/60 Hz | • Warranty | 5 Years |
| • Dimming | TRIAC Dimmers 10% - 100% | | |
| • Approved Location | Insulated Ceiling & Damp Locations | | |



PREPARED BY:

PROJECT:

TYPE:



4" Recessed Slim Downlight

Fire Rated

ORDERING GUIDE

| Model | Input Voltage | Wattage | Finish | Color Temperature | Accessories | Strengthen Accessories |
|---------|-----------------|------------|--------------------------------|---|--|--|
| LB11451 | 120V AC 50/60Hz | 9W (900LM) | White Black Stain Nickel | 5CCT 2700K, 3000K, 3500K, 4000K, 5000K | FGP Flanged Plate With Hanger Bars Model FRP 26" Flat Rough-In Plates MFP 13" Mounting Plate Flat UMP Universal Mounting New Construction Plate | FRC Tenmat Fire Rated Light Cover FRB IC Fire Rated Box |

ACCESSORIES



Flanged Plate
With Hanger Bars Model




26" Flat
Rough-In Plates



13" Mounting
Plate Flat



Universal Mounting
New Construction Plate



Tenmat Fire Rated
Light Cover



IC Fire Rated Box