



LB11800

DOWNLIGHT SERIES

PROJECT:
PREPARED BY:
DATE:
TYPE:



FEATURES

- Covered ceiling mount only
- Suitable for Damp Location
- Inherently protected
- Vapor barrier must be suitable for 90°C

PERFORMANCE

• Wattage	12W	• CRI	90
• Lumens	900LM	• Dimming	Traic Dimming
• Input Voltage	AC 120V, 60Hz	• Environment	Damp Location
• CCT	2700K/3000K/3500K/4000K/5000K	• Beam Angle	38°

ORDERING GUIDE

Model	Wattage	Lumens	CCT
LB11800	12W	900LM	5CCT Select (2700K/3000K/3500K/4000K/5000K)

ACCESSORIES ORDERING GUIDE

Model	Description
NCH350	New Construction Plate

LB11800

DOWNLIGHT SERIES





PROJECT:

PREPARED BY:

DATE:

TYPE:

DIMENSIONS

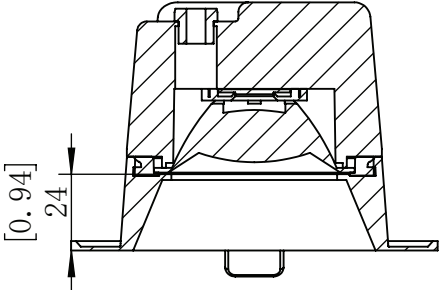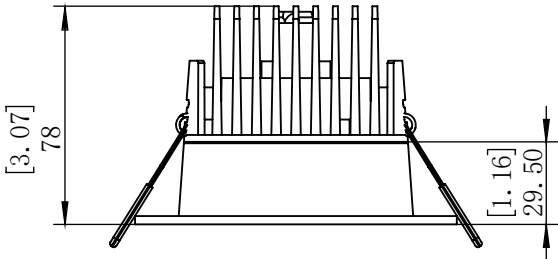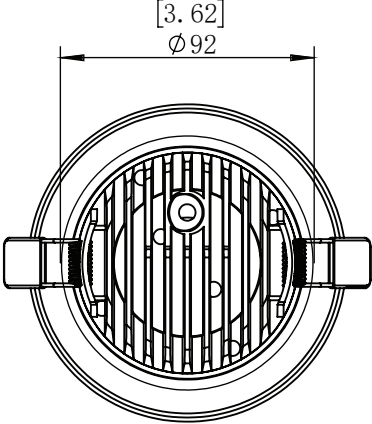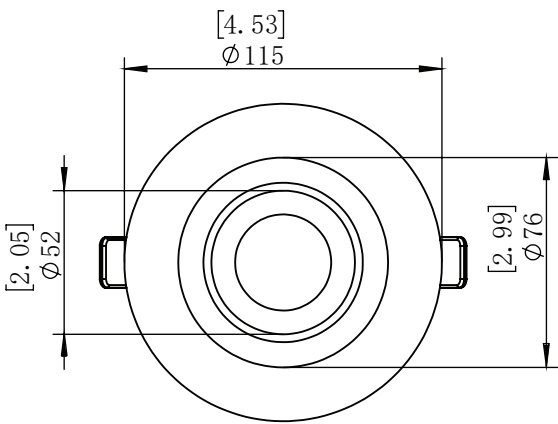

LB11800

DOWNLIGHT SERIES

PROJECT:

PREPARED BY:


DATE:

TYPE:

ACCESSORIES

NEW CONSTRUCTION MOUNTING PLATE NCH350

- Constructed out of galvanized steel
- Magnetic plate and driver facilitate easy and secure placement
- Adjustable Hanger Bars up to 24"

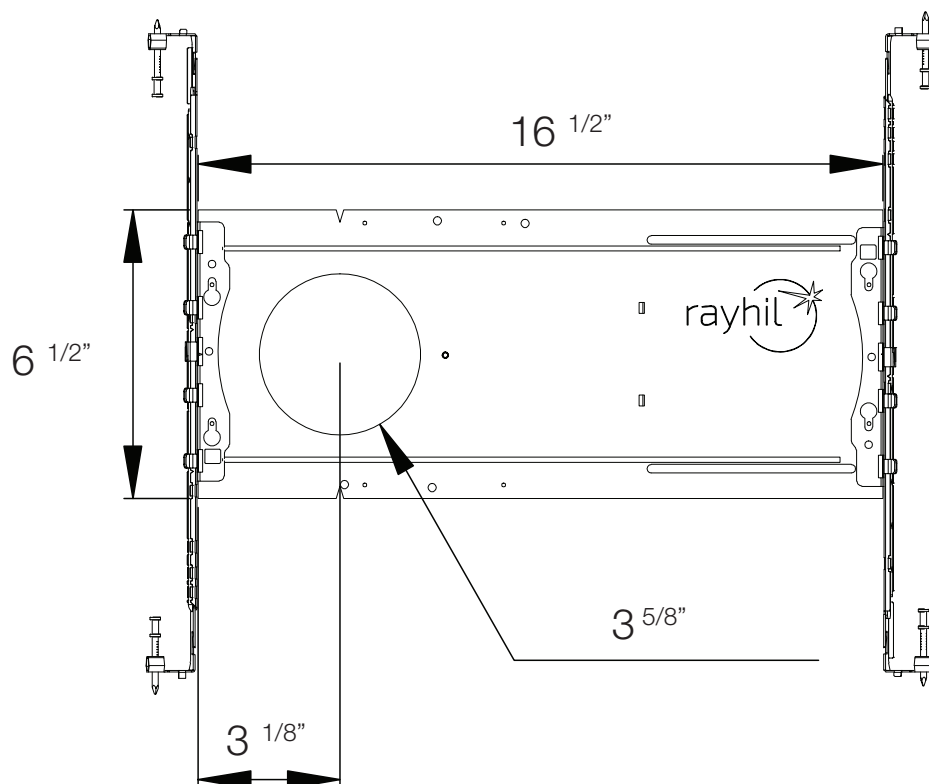




LB11800

DOWNLIGHT SERIES


PROJECT:
PREPARED BY:
DATE:
TYPE:

DISTRIBUTION DIAGRAM

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

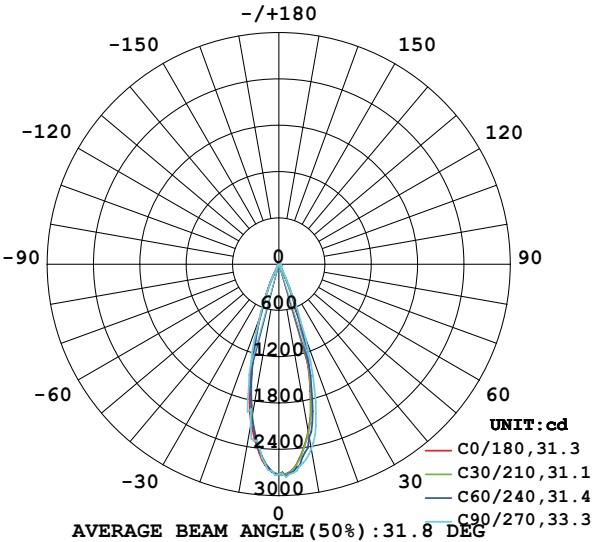

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

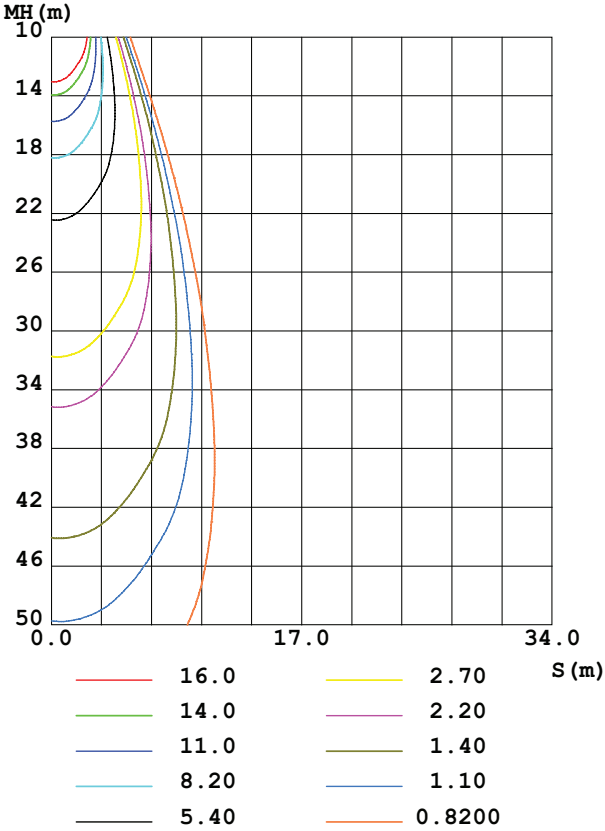

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-09-25

☒ Range: 0 - 90DEG
☒ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:5.620m [K=1.0000]
Remarks: