

LB11810

DOWNLIGHT SERIES

PROJECT:

PREPARED BY:

DATE:

TYPE:



FEATURES

- Covered ceiling mount only
- Suitable for Damp Location
- Inherently protected
- Vapor barrier must be suitable for 90°C


PERFORMANCE

• Wattage	7W	• Environment	Damp Location
• Lumens	650LM	• Beam Angle	36°
• Input Voltage	AC 120-277V, 60Hz	• Trim Color	White
• CCT	2700K/3000K/3500K/4000K/5000K	• Cut out	2.4"
• CRI	90	• Life hours	50,000hrs
• Dimming	Traic/0-10 Dimmable	• Warranty	5 Years

ORDERING GUIDE

Model	Wattage	Lumens	CCT
LB11810	7W	650LM	5CCT Select (2700K/3000K/3500K/4000K/5000K)

Model	Description
LB15158	New Construction Plate

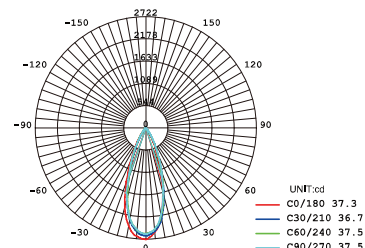




LB11810
DOWNLIGHT SERIES

PROJECT:
PREPARED BY:
DATE:
TYPE:

DIMENSIONS

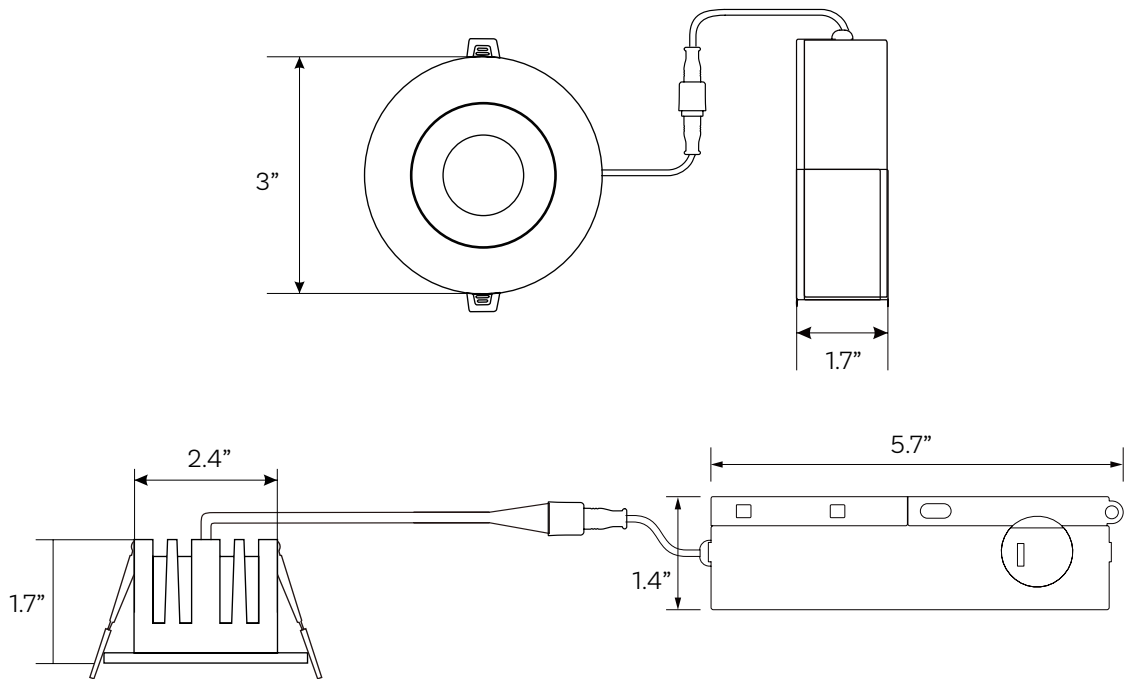

NEW CONSTRUCTION PLATE

