

RF SINGLE COLOR REMOTE CONTROLLER

Catalog #		Type
Project		Date
Prepared by		

SPECIFICATIONS

Operation Voltage..... 4.5V (3xAAA battery)
 Operation Frequency..... 868MHz
 Dimensions..... 4.72" x 2.17" x 0.67" (L120mm x W55mm x H17mm)


MODEL #	LB2819
----------------	--------

Features and benefits:

- 4 zones/areas
- Single color controller
- Compatible with all universal series RF receivers



BRIEF INTRODUCTION OF BUTTONS

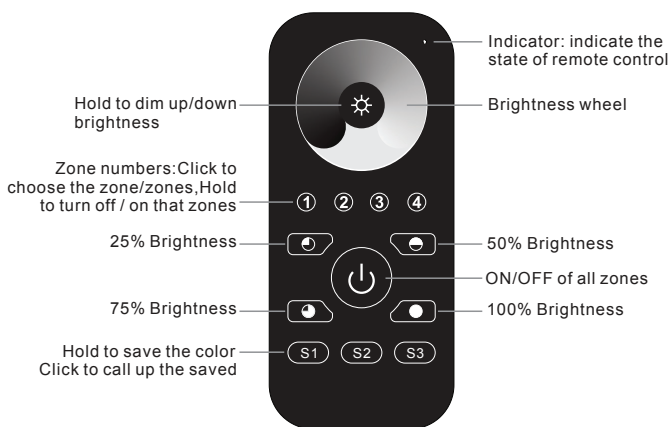

Note : This remote controls 4 zones (areas) receivers, each zone can pair with countless receivers.
 1 receiver can be paired by max 8 different remote controls.

OPERATION

1. Pair with RF receivers:



2. Play the remote after pairing:



3. Save color/scene:



4. Call up the saved:

Select zone button which we want to call up , then click save button S1,S2,S3.

5. How to delete the pairing:

Power on the RF receiver, hold the "Learning Key" over 3 seconds until connected led lights flicker twice means well deleted.

