

PREPARED BY:

PROJECT:

TYPE:



# LED FLOOD LIGHT

## OUTDOOR LIGHTING




### FEATURES

- High lumen, using >160LM/W led chip, whole lamp lumen efficiency >120LM/W
- Wide input voltage AC100-277V
- Best heat sink to get the best heat dissipation
- Easy to install and operate
- Energy saving, Instant start, No flickering, No humming, long service life


### SPECIFICATIONS

- Wattage 100W/150W
- Input Voltage 100-277VAC 50/60Hz
- Luminous Efficiency 120LM/W
- CCT 5000K
- Color Cool White
- CRI >75
- Angle 120°
- Material Aluminum + Toughened glass
- IP IP65
- Lifespan >50,000hrs
- Working Temperature -37°C to 55°C
- Operating Humidity <95%
- Storage Temperature 37°C to 55°C
- Certificates DLC UL cUL
- Warranty 5 Years

100W

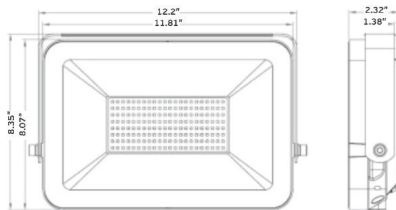

150W

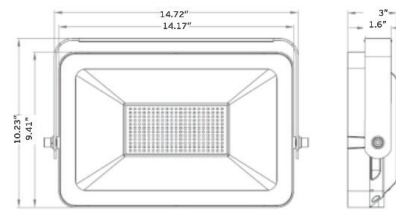

### ORDERING GUIDE

Model	Wattage	Lumens
LB75120	100W	12000LM
LB75121	150W	18000LM



PREPARED BY:

PROJECT:

TYPE:




# LED FLOOD LIGHT


## OUTDOOR LIGHTING

### INSTALLATION


#### 1. LAMP FASTEN AND WIRE




1. Drill hole on the wall.



2. Put the expansion screw into the wall.




3. Fasten the lamp on the wall.




4. Wire according to the diagram.


#### 2. MULTIPLE APPLICATION



Wall Application



Ground Application



Ceiling Application