

PREPARED BY:  
PROJECT:  
TYPE:



# IN-GROUND RGB 3 WATTAGE 45° LANDSCAPE SERIES



## SPECIFICATIONS


• Wattage	3W	• Dimming	Non-Dimmable
• Voltage	24VDC	• Beam Angle	25°/ 40°
• Lumens	130LM	• Trim	Stainless Steel 316
• CCT	RGB	• Weight	0.79lb (0.36kg)
• CRI	80+	• Dimensions	1" x 4.1"
• IP Rating	67		

## ORDERING GUIDE

Model	Wattage	CCT	Lumens	Dimensions
LB77125	3W	RGB	130 LM	1" x 4.1"

**\*NOT COMPATIBLE WITH DIMMABLE DRIVERS**

Light Distribution Curve [Unit: cd]

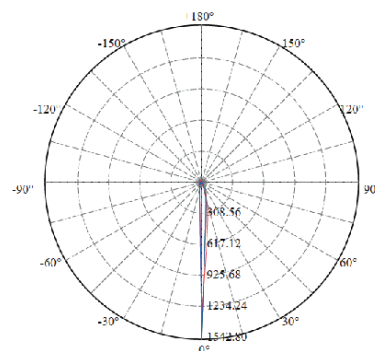

Lux distance Curve

	Illuminance at a Distance	
	Center Beam LUX	Beam Width V II
2m	330.90 LUX	0.4m 0.4m
4m	82.73 LUX	0.7m 0.8m
6m	36.77 LUX	1.1m 1.2m
8m	20.68 LUX	1.4m 1.6m
10m	13.24 LUX	1.8m 2.0m
12m	9.19 LUX	2.2m 2.4m

Vert. Spread: 10.3      Horiz. Spread: 11.5

