

PREPARED BY:

PROJECT:


TYPE:



RGBW SERIES

STRIP LIGHTS

The Strip Light Series brings forward a contemporary and versatile sector of lighting. Optimal varieties of wattage and color temperatures are at the ready, in order to make any application possible. Every Strip Roll is made with the highest attention to detail and quality. Each and every chip is carefully tested to fulfill the Light Blue USA promise to deliver the most elite illumination for your environment.

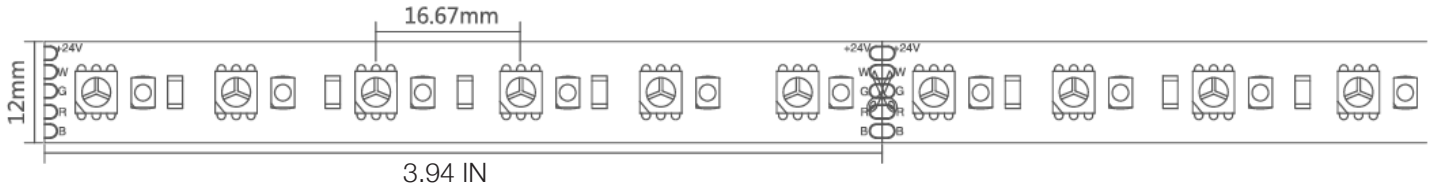

• Wattage	5W/FT	• Dimming	Triac
• Input Power	24V	• Length per Roll	16.4ft.
• CRI	80	• Ambient Temperature	-20 °C to 40 °C
• LED Chip	5050 RGB / 3528 W	• Height	0.02"
• Environment	IP20/IP65	• Width	0.47"
• Cutting Interval	3.94"	• Adhesive	3M
• Maximum Run	16.4ft.	• Warranty	5 years
• Certification	UL / ETL		

ORDERING GUIDE

Model	Length (ft)	IP Rating	Wattage	Color Temperature	Lumens/ft	Efficacy
LB53104	16.4 ft	IP20	5W/ft	RGB+2700K	165lm	33lm/W
LB53105				RGB+4000K	171lm	34lm/W
LB53182	16.4 ft	IP65	5W/ft	RGB+2700K	158lm	31lm/W
LB53183				RGB+4000K	164lm	32lm/W

*CONTACT FOR STOCK CONFIGURATIONS

- Runs can not exceed 16.4 feet per home run
- Maximum driver distance of 20 feet before voltage drop (with 18 gage wire)

*** COMPATIBLE WITH ELECTRONIC DRIVER ONLY ***

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

